DURAMAX™ ALL PURPOSE VINYL GARDEN SHEDS — A Product of USP US POLYMERS INC

Vinyl Garden Shed

OWNER'S MANUAL /
Instructions for Assembly '6 Ft WoodSide'
Size 6 Ft x 6 Ft / 1.9 m x 1.9 m (Approx.)

ISO 9001:2008

Ver: 2.0

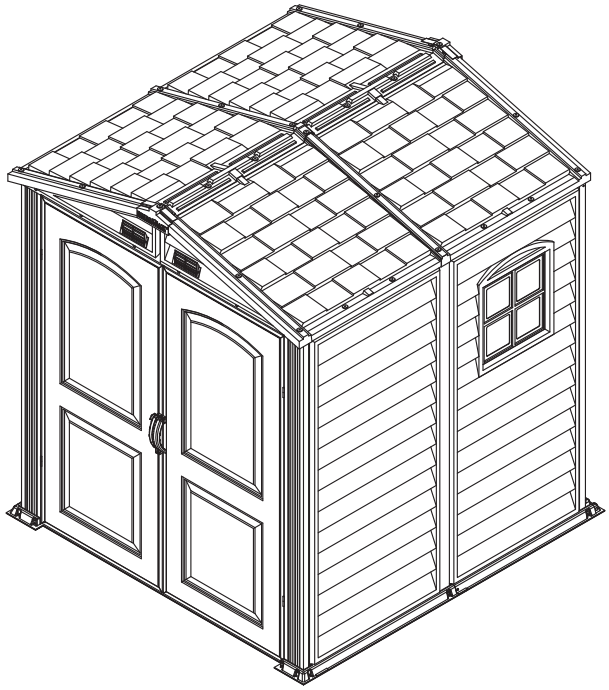

Customer Service Hotline
(800) 483-4674
www.duramaxbp.com

Your Total Solution To Maintenance Free Storage Sheds.

- All Weather Durable PVC
- Won't Dent, Rust, Rot or Mildew
- Tall Walk In Shed
- Never Needs Painting
- 61 Inch Wide Double Doors
- Easy Assembly
- Snow Load Tested 20lbs/sq. ft
- Pad Lock Ready (Lock not included)
- Shutter Proof Glazed Window Included

Requires two people and takes about 2-3 hours for Installation.

Call us for any missing or damaged parts.
Do not return to the store.

Building Dimensions :

Approximate Size	Storage		Exterior Dimension					Interior Dimension		Door Opening	
	Area	Volume	Base Dimension			Roof Edge to Edge		Wall to Wall			
				inch	cm	inch	cm	inch	cm	inch	cm
6 Ft x 6 Ft	33 1/4 Sq. Ft	198 1/2 Cu.Ft	Width	74 3/4	190	73 1/2	186.8	69 1/4	176	60 5/8	154
1.9 m x 1.9 m	3.1 Sq.m	5.6 Cu.m	Depth	75 5/8	192	73 7/8	187.6	69 1/4	176		
			Height			83 7/8	213	71 1/4	181	70	178

Duramax Garden Shed
Limited Fifteen Year Warranty

U.S. Polymer Inc. will send a replacement part free of charge, in the event of material defects and or workmanship for a period of fifteen years from the date of purchase.

This warranty is extended only to the original purchaser. A purchase receipt or other proof of date of original purchase will be required before warranty service is rendered. In no event shall we pay the cost of flooring, labor, installation or any other costs related thereto.

This warranty only covers failures due to defects in material or workmanship which occurs during normal use and does not extend to color change arising due to normal weathering or to damage resulting from misuse or neglect, commercial use, failure to follow assembly instructions and the owner's manual (including proper anchoring of the shed), painting, forces of nature and other causes which is beyond our control.

Claims under this warranty must be made within the warranty period by calling 1-800-483-4674 or mail in a dated sales slip and clear photograph of the part to:

U.S. Polymers, Inc.
1057 S. Vail Ave,
Montebello, CA 90640.

We reserve the right to discontinue or change components. If a component has been discontinued or is not available,
U.S. Polymers, Inc. reserves the right to substitute a component of equal quality as may be compatible.

Limits and Exclusions

There are no express warranties except as listed above. The warrantor shall not be liable for incidental or consequential damages resulting from the use of this product, or arising out of any breach of this warranty. All express warranties are limited to the warranty period set forth above . Some states do not allow the exclusion or limitation on how long an implied warranty lasts, so the above limitations may not apply to you.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state or country to country.

"We recommend to clear snow from the Roof top after each Snowfall."

SAFETY & PRECAUTIONS

Before You Begin...

1. Check your local building codes regarding footings, location, etc.

2. Select a site that allows enough working space around the shed.

3. Determine building foundation and anchor system.

4. Read and understand the Owner's manual enclosed in the package.

5. Follow all directions and dimensions thoroughly.

6. Follow the steps given in the manual carefully for correct assembly.

7. Make sure all parts are present before you start assembling.

8. BE SAFE : Follow safety instructions and avoid injury. (See inside page).

9. GROUND MUST BE EVEN : Make sure the foundation frame lies flat on the ground. If the earth bed is uneven, remove sod and other debris and level it with a flat shoval.

10. Separate contents of the carton by the part number and review the list.
Be sure you have all the necessary parts for your shed.
Refer Owner's manual for part list.

SAFETY & PRECAUTIONS

For your own safety, please read and follow these instructions during the shed assembly.

1. Always wear work gloves, long sleeves and eye protection during assembly of the shed. Some pieces of the shed contain sharp edges and can cause injury.

2. Be cautious with the tools used for the assembly of the shed. Familiarize yourself with the operation of all the power tools.

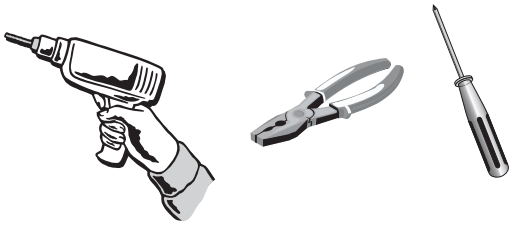

3. Children and pets should be kept away from the assembly site to avoid any distractions and accidents.

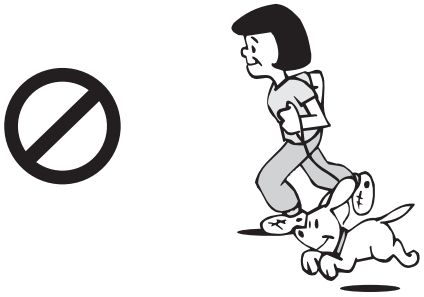

4. When using a step ladder, make sure it is on even ground and fully open with the safety latch in place. Never concentrate your full weight on the roof or any part of the shed.

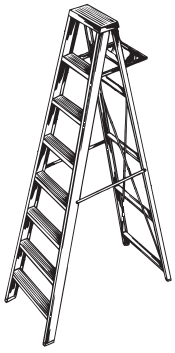

5. Do not attempt to assemble the shed on a windy day. Shed panels can be whipped across by the wind making the worksite difficult and dangerous.

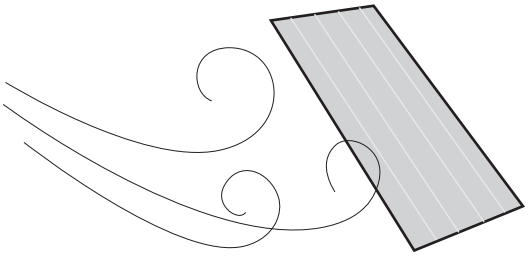

IMPORTANT

☞ Wear eye protection when using any form of power tools. Do not use voltage power tools in a wet or damp enviornment to avoid electric shock.

☞ Do not use any part of the shed as a means of personal support while attaching components during assembly.

☞ **The shed must be constructed on a solid base foundation.** A concrete pad or a large size concrete patio stone squares is recommended for suitable floor base. Make sure it is firm and level and will allow drainage away from the site. The base foundation should be at least 4 inches (100mm) larger than the shed dimensions. Please refer to the front page of your owner's manual for the exterior dimensions of the shed. **Manufacturer is not responsible for the choice and construction of the foundation.**

For a concrete pad base, prepare a level bed for a firm footing layer of crushed stone. The concrete pad should then be poured to a thickness of 4 inches (100mm) to 5 inches (125mm). Allow to dry thoroughly for at least 48 hours

☞ Your shed must be firmly anchored to the concrete pad or large concrete patio stone squares, to help protect against damage in high winds.

Care & Maintenance

Although this unit does not require any maintenance, care should be taken to prolong the life of your shed.

ROOF : Keep roof clean of leaves and snow with long handled, soft bristled broom. Heavy amounts of snow on the roof can damage the shed making it unsafe. **Do not step on the roof.**

WALLS : Do not rest any object against the wall panels of the shed.

DOORS : Keep doors closed to prevent wind damage.

FASTENERS : Regularly check your shed for loose screws, bolts, nuts, etc. And retighten them as necessary.

MOISTURE : With changing temperatures, condensation will accumulate inside the shed. Good ventilation will help in regulating and avoid moisture.

TIP : A noncorrosive caulking is helpful to seal the shed.

DO NOT store swimming pool chemicals in your building.
Combustibles and corrosive must be stored in
air tight containers

6’ x 6’ WoodSide Parts List

PARTS

CODE	QTY	CODE	QTY
FCLM	1	RS14R	4
FCRM	1	BPFM	1
CMM	3	BPBM	1
CCM	2	SPM†	5
CB3R	3	SPMW†	1
RS1R	2	FPLM	2
RS8R	4	FPRM	2
RS9R	4	R1LR	1
RS3R	2	R2LR	1
RS5R	1	R1RR	1
RS2LR	3	R2RR	1
RS2RR	3	DL	1
DSHQ	1	DR	1

ACCESSORIES

CODE	QTY	CODE	QTY
FDCL	1	PGCM	2
FDCR	1	MCC	1
FCC	4	L	1
FMC	3	R	1
FCB	4	S1	113
RJ	4	S2	12
PPG	57	S5	18
PIN	57	S6	18
PPGL	1		
PINL	1		
BPP	8		
BPIN	8		
PWS	58		


FCLM


FCRM


CCM


CMM

Note

1. Before starting installation, please refer Safety & Precautions.

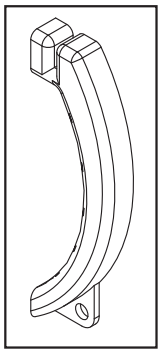
L

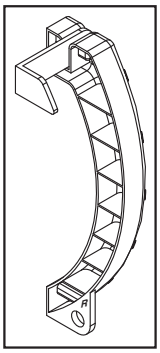
R


CB3R, RS1R, RS3R


RS8R, RS9R


RS5R


RS2LR, RS2RR


PIN, BPIN, PINL


PPG, BPP, PPGL


RS14R


DSHQ


FDCL


FMC


FCB

EC


MCC


CBC


RJ


FDCR


PGCM


S1, S2


S5, S6


FCC

Tools You Will Need

Cordless Drill - Philips Head
Hammer or Rubber mallet
Carpenters Square
8’ Step Ladder
Adjustable pliers
Level - 3ft.
Tape Measure
Caulk Gun
Waterproof Clear Silicon
Hand Gloves

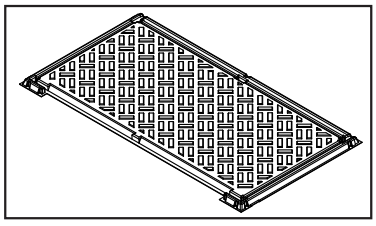
BPFM

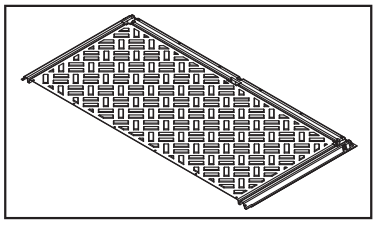
BPBM

6’ x 6’ WoodSide Exploded View

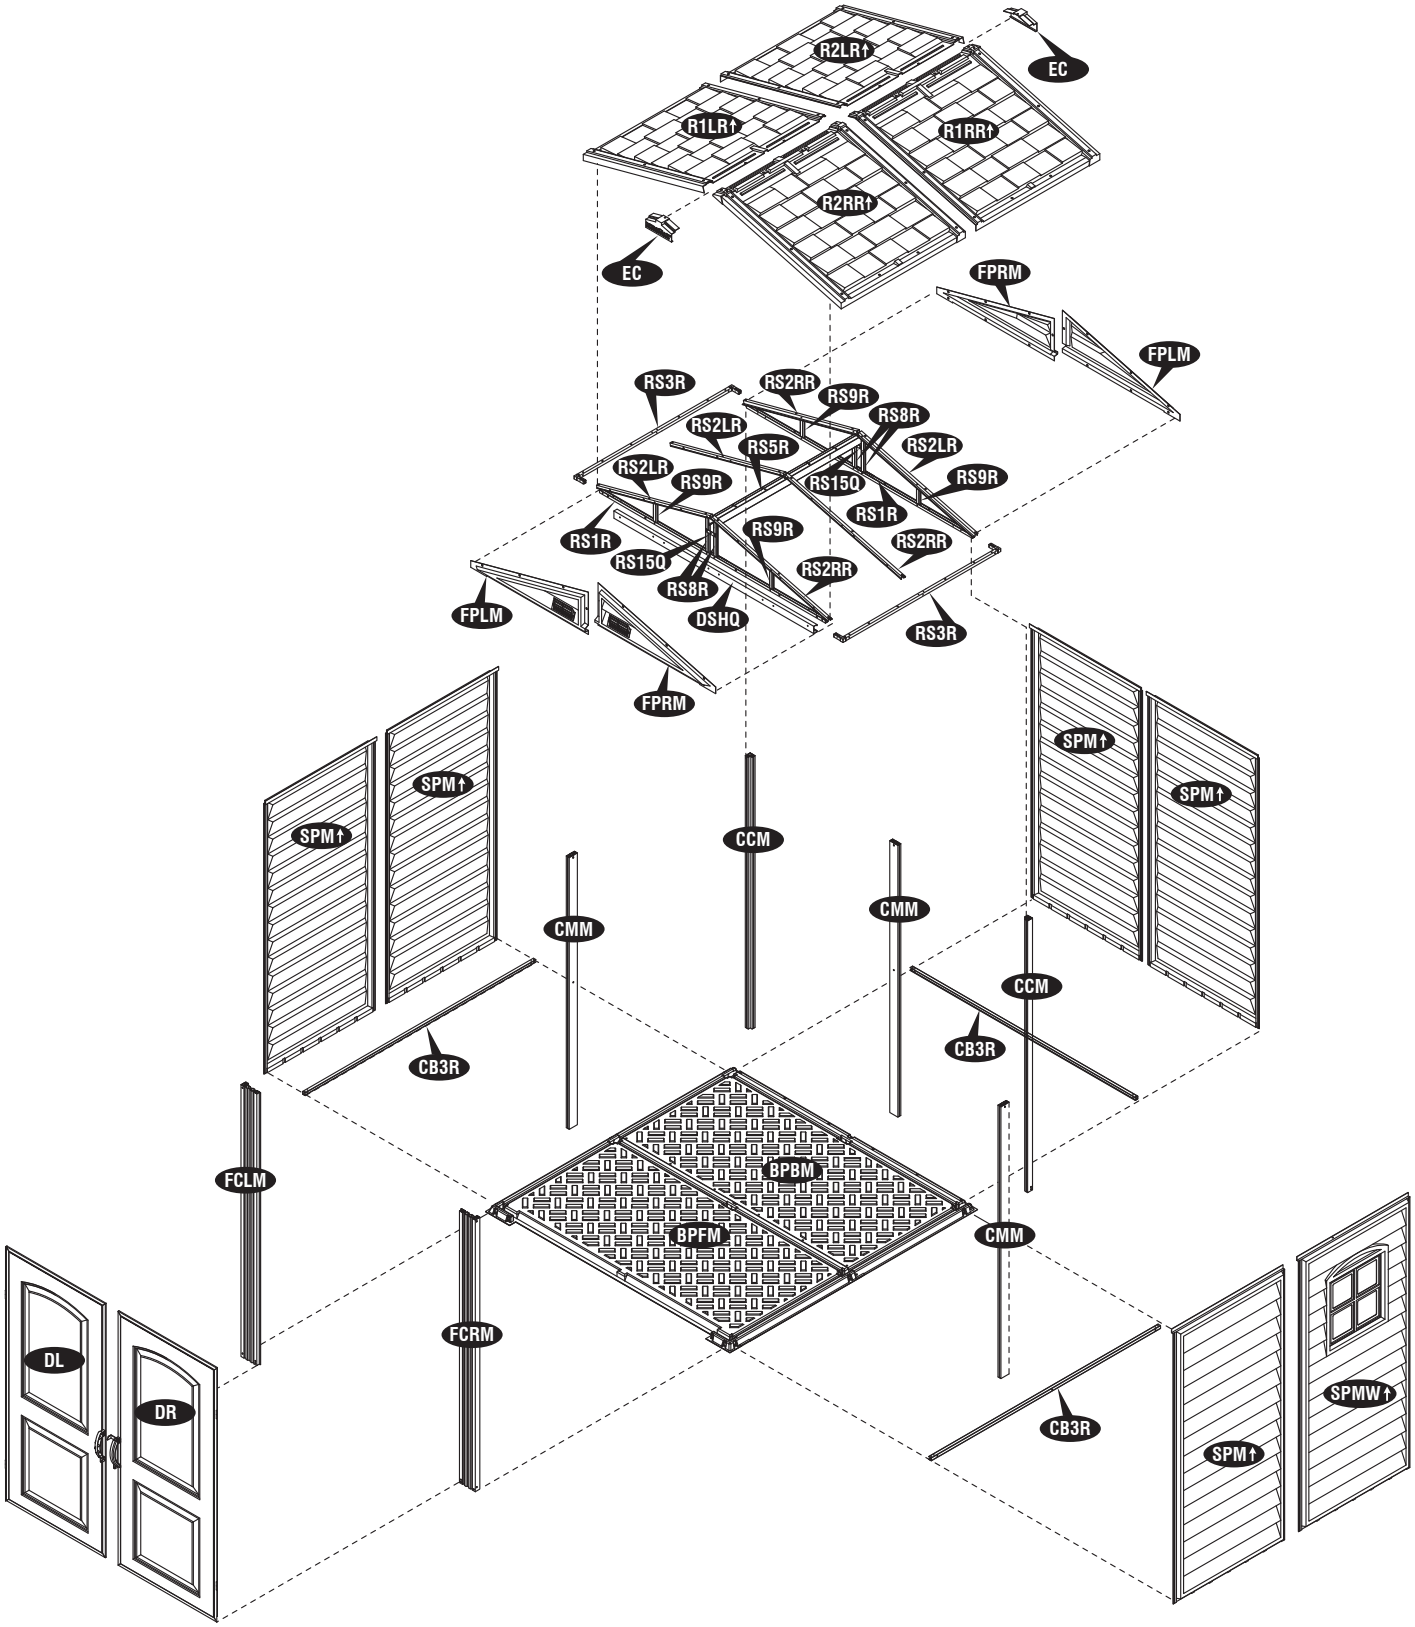

A. Wall & Columns

Note

1. It is important that these instructions are followed step by step.
2. All parts are clearly marked and care should be taken to use the correct one.
3. Don't install under windy conditions.
4. If you are building the shed against a wall, build it 2.5 ft. away then slide it in.

Parts Needed

Code	Qty	Code	Qty
BPFM	1	CBC	2
BPBM	1	FCB	4
FCLM	1	BPP	8
FCRM	1	BPIN	8
CMM	3	SPM↑	5
CCM	2	SPMW↑	1
CB3R	3	S1	12
		S2	4
		S5	18
		S6	18

1

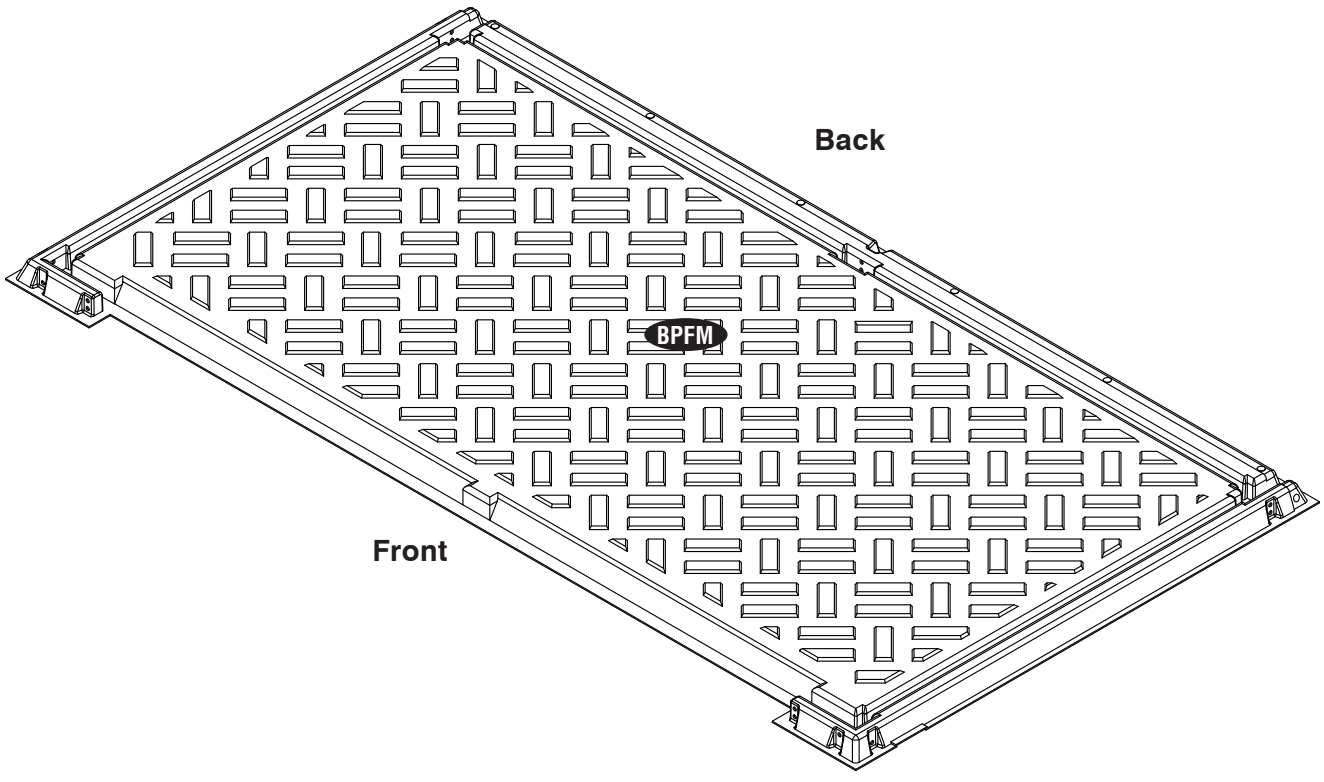

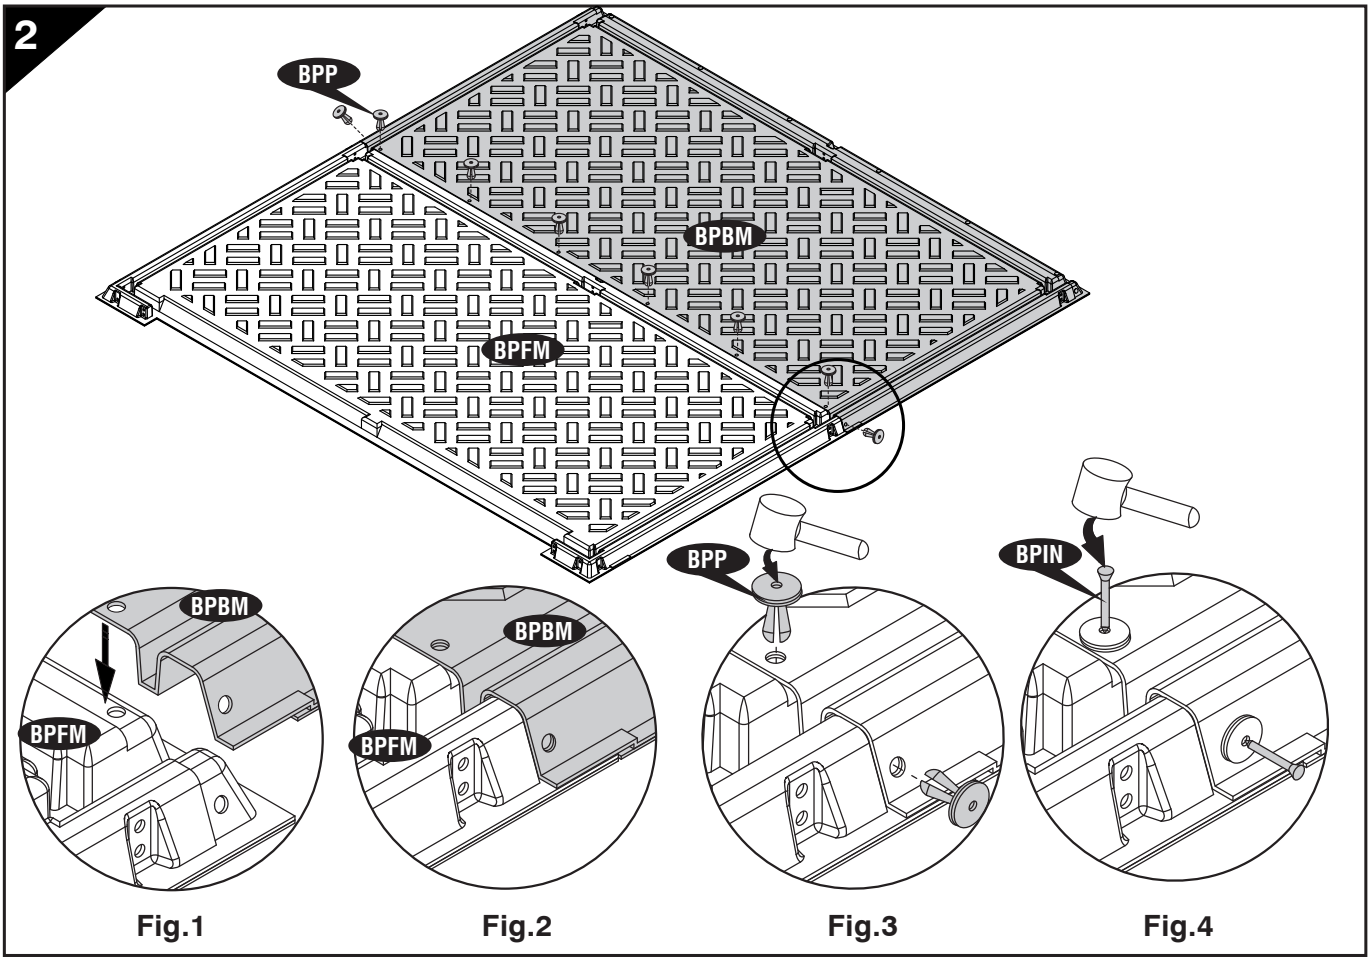
2
BPP
BPBM
BPFM
BPBM
BPFM
BPBM
BPFM
BPP
BPIN
Fig.1
Fig.2
Fig.3
Fig.4

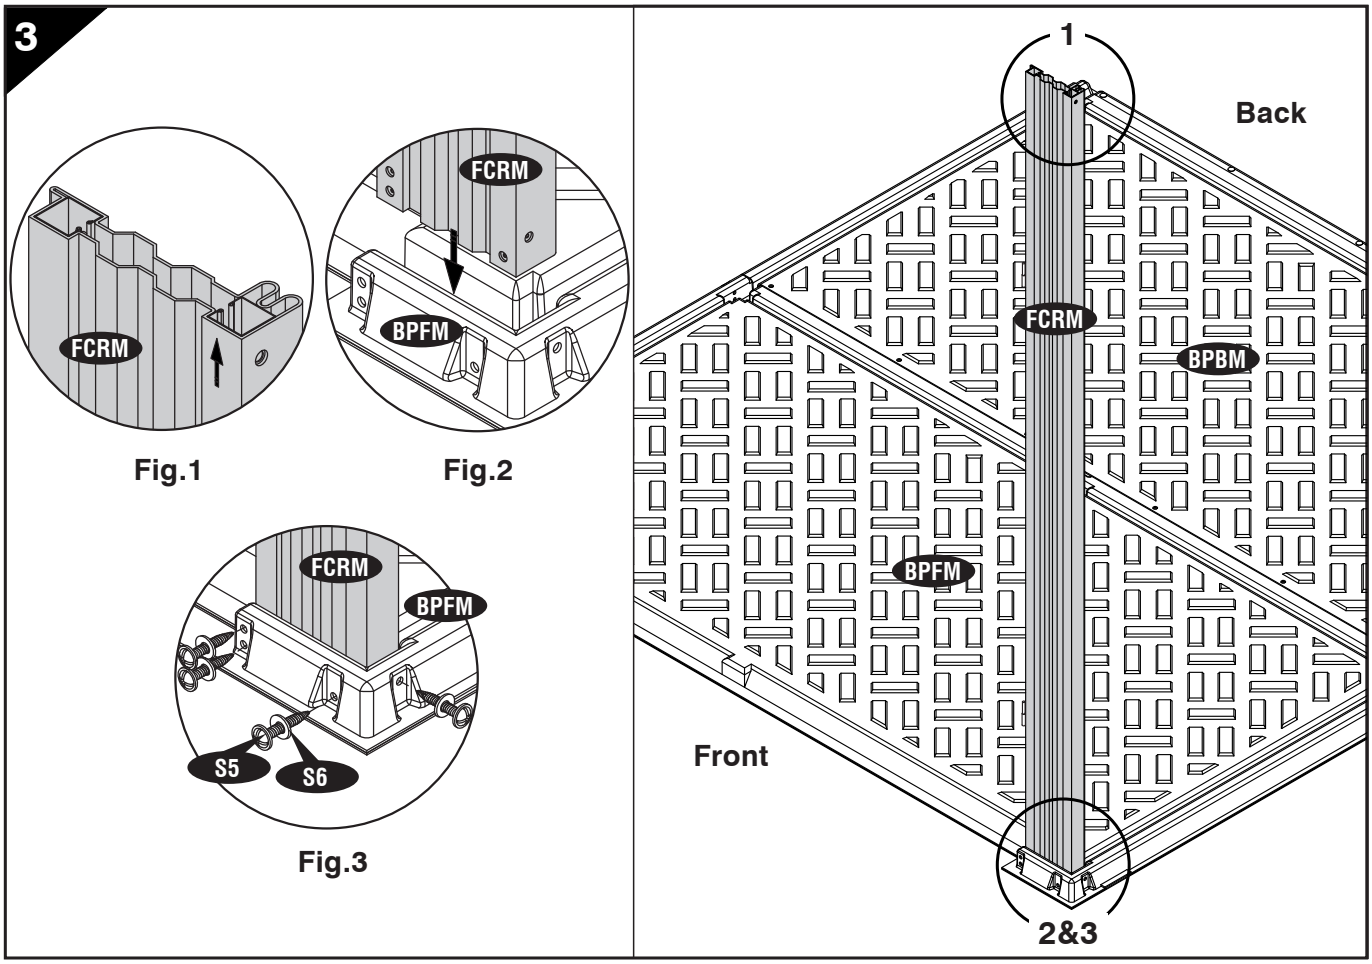
3
FCRM
FCRM
BPFM
Fig.1
Fig.2
FCRM
BPFM
S5
S6
Fig.3
1
Back
FCRM
BPBM
BPFM
Front
2&3

4

Note

1. One shutter proof glazed window panel (SPMW) included. This can be fixed at any place.

2. Check the stamped label on top of all panels inside.



Fig.1



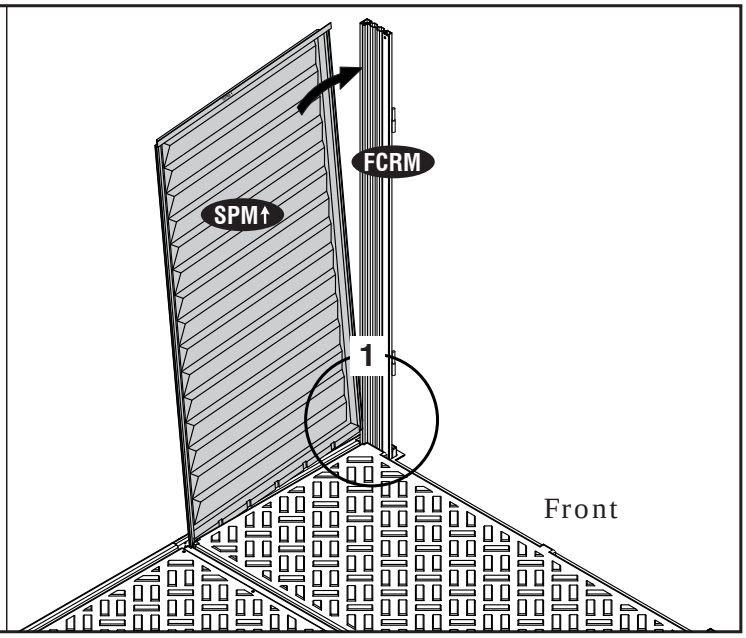

5



Fig.1



Fig.2



Fig.3

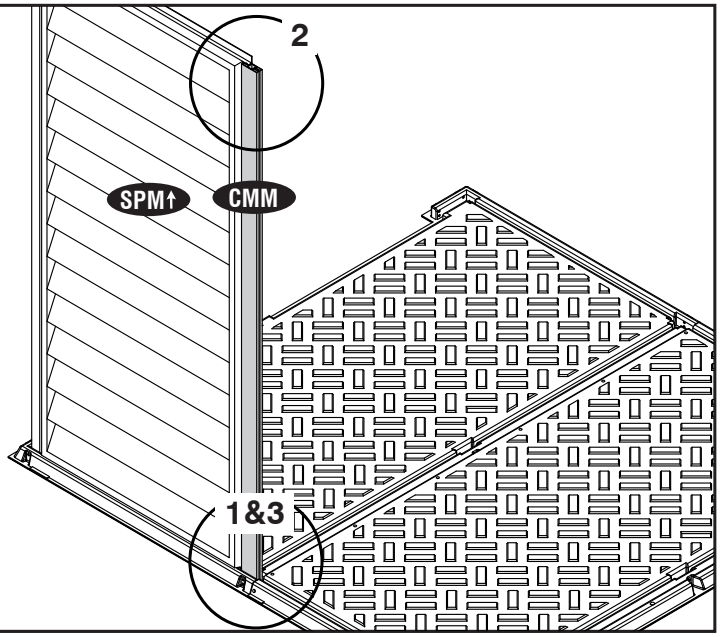

6

Note

Do not tighten the screw. Leave it loose



Fig.1

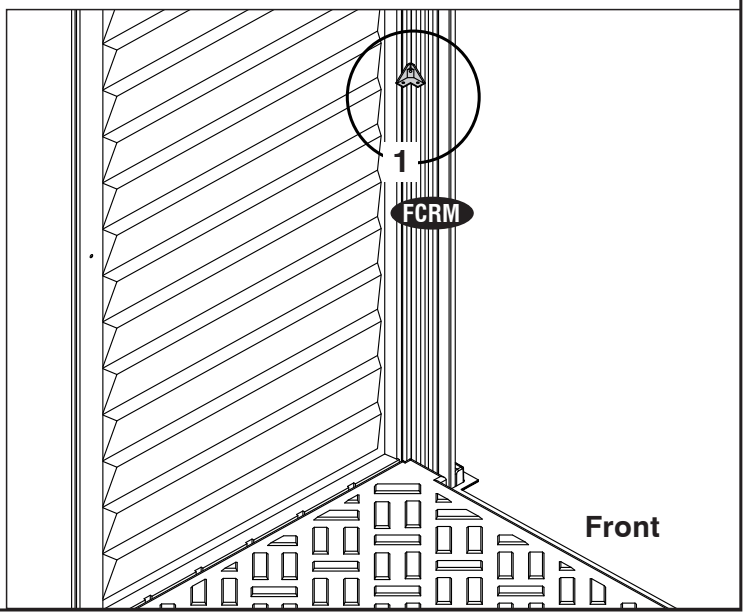

7



Fig.1



Fig.2

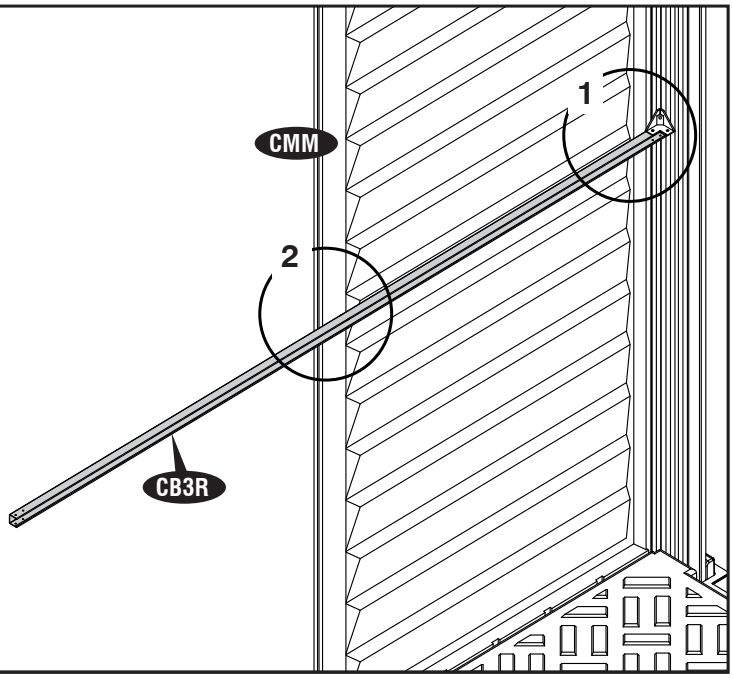

8



Fig.1



Fig.2

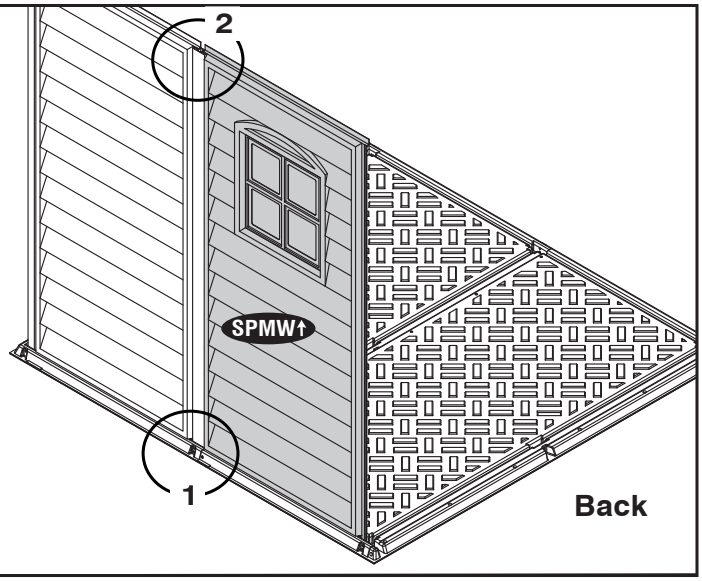

9



Fig.1



Fig.2

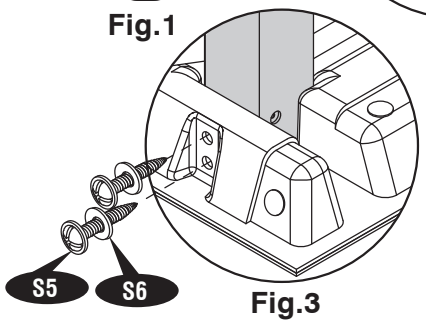

Fig.3

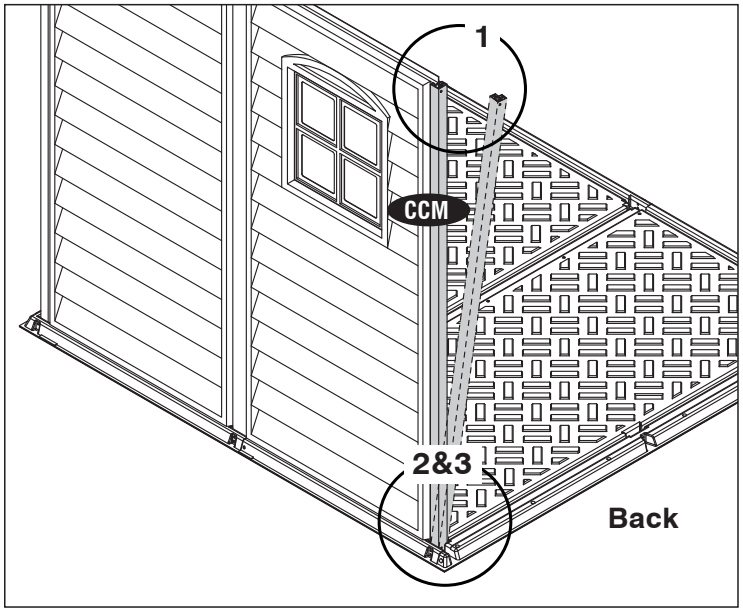

10

Note

Do not tighten the screw. Leave it loose.



Fig.1

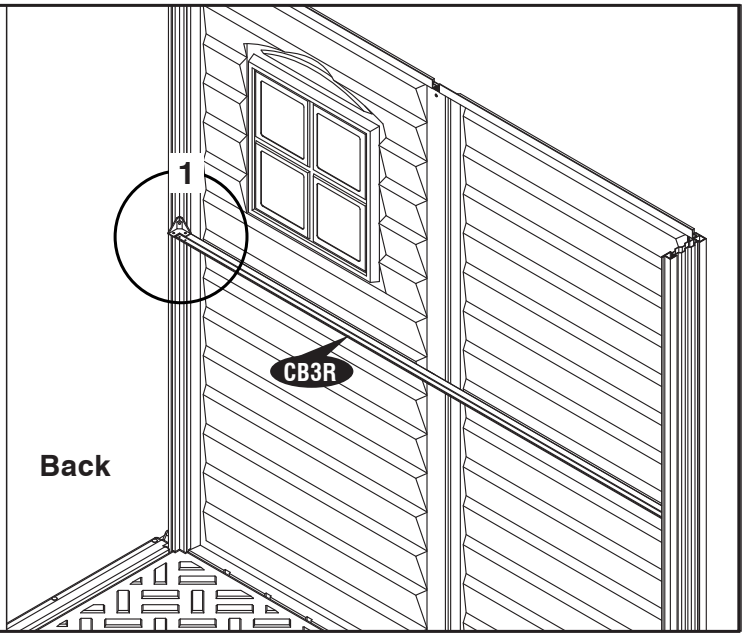

11



Fig.1

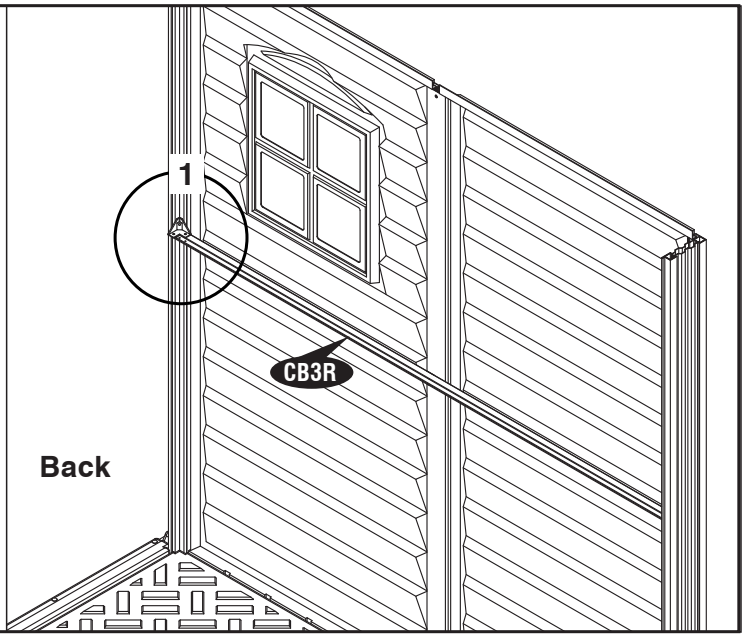

12



Fig.1



Fig.2

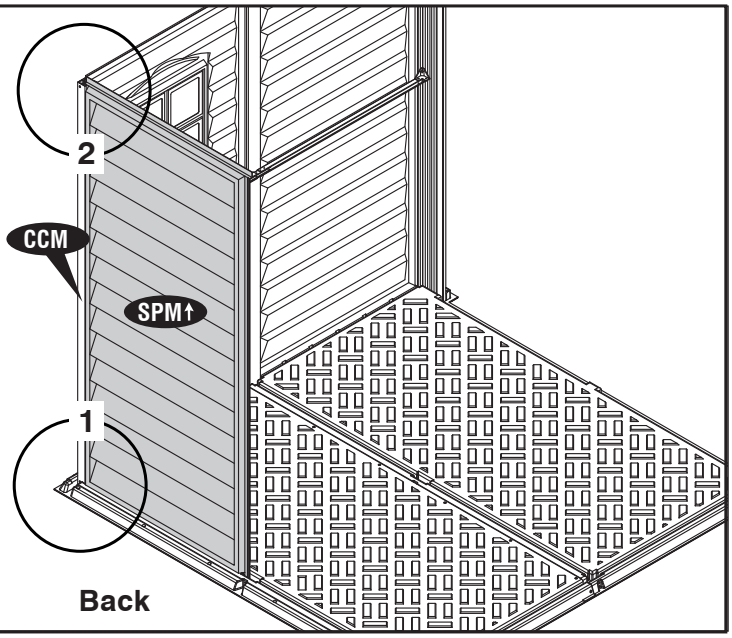

13



Fig.1



Fig.2



Fig.3

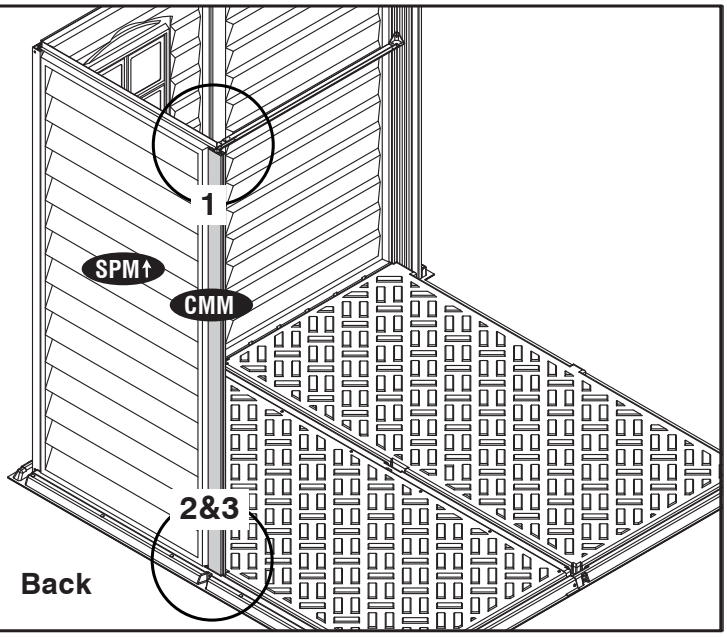

14



Fig.1



Fig.2



Fig.3

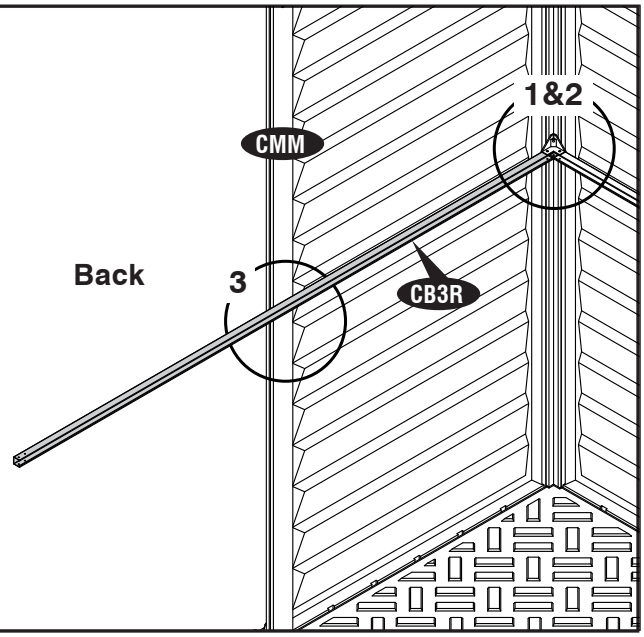

15



Fig.1

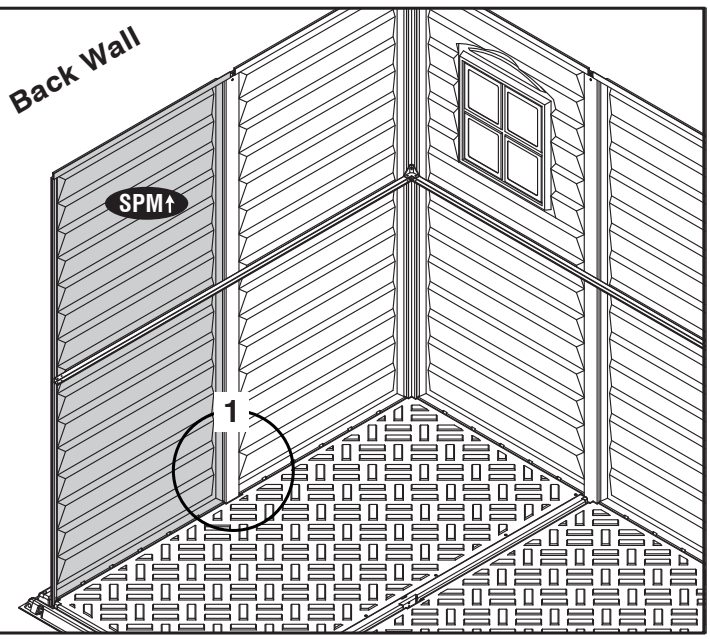

16



Fig.1



Fig.2

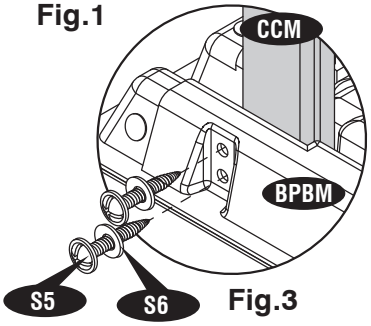

Fig.3

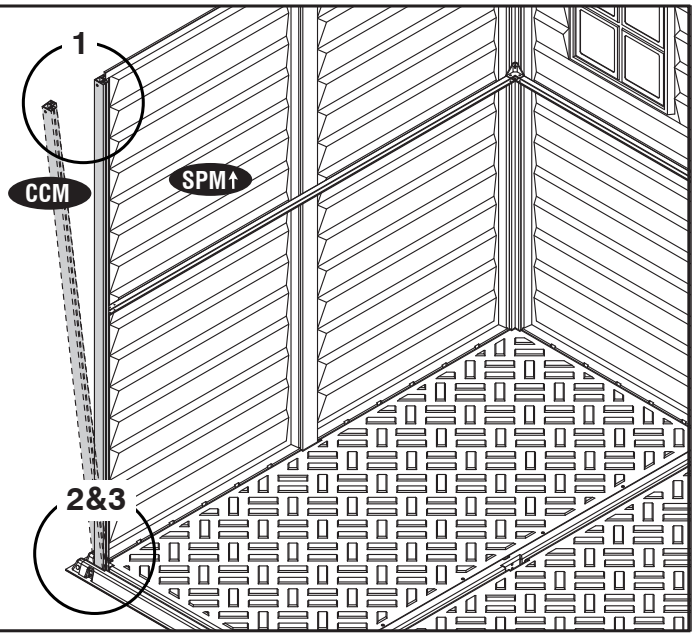

17

Note

Do not tighten the screw. Leave it loose.



Fig.1

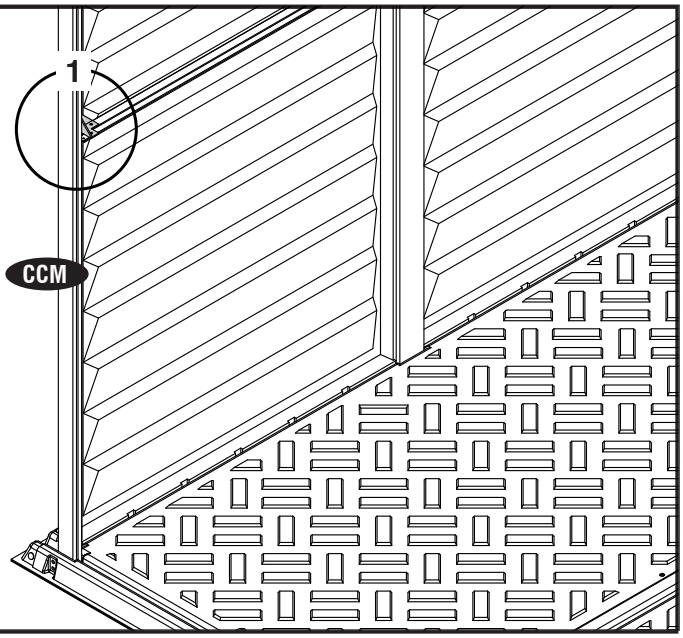

18



Fig.1

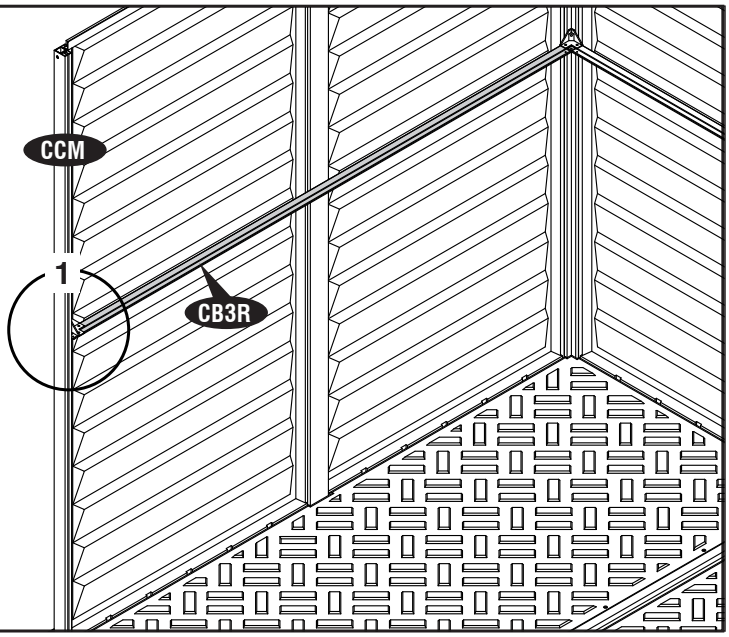

19



Fig.1



Fig.2

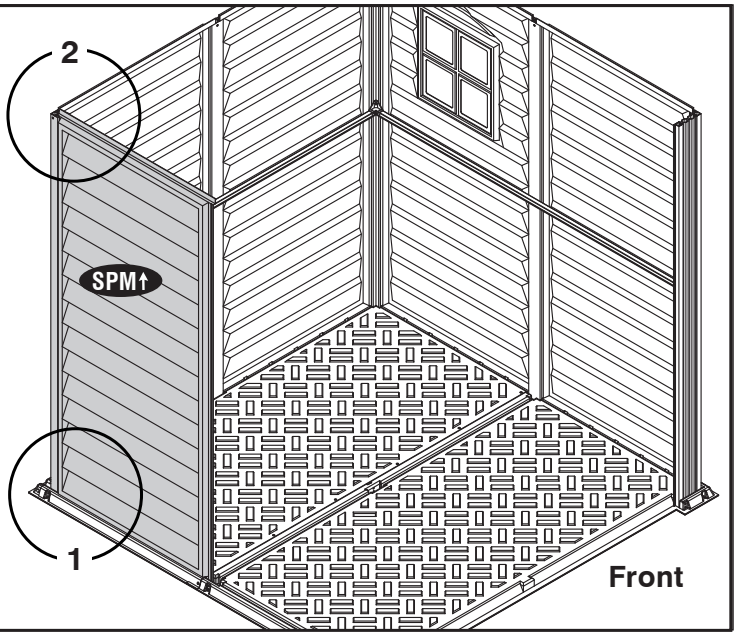

20



Fig.1



Fig.2



Fig.3

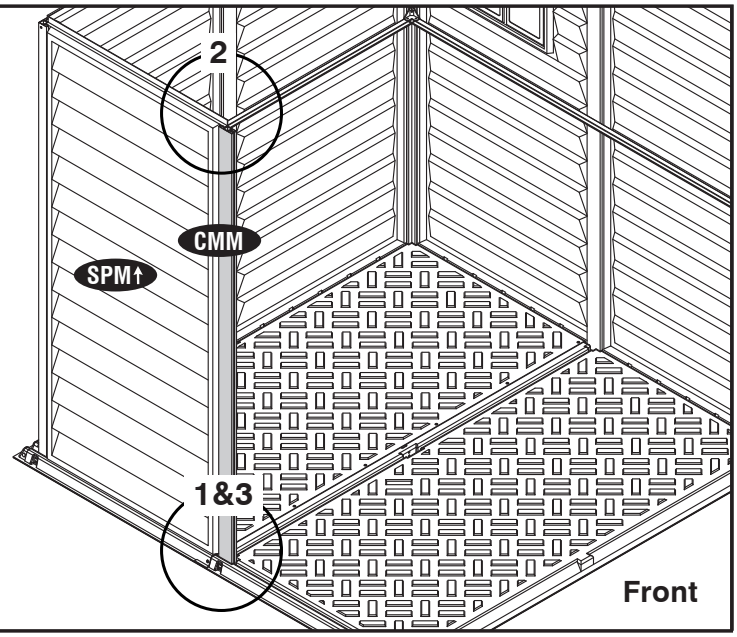

21



Fig.1



Fig.2

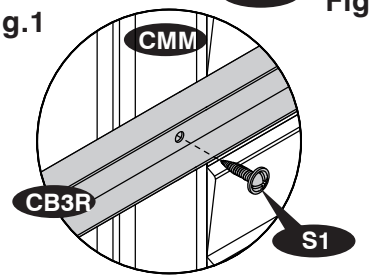

Fig.3

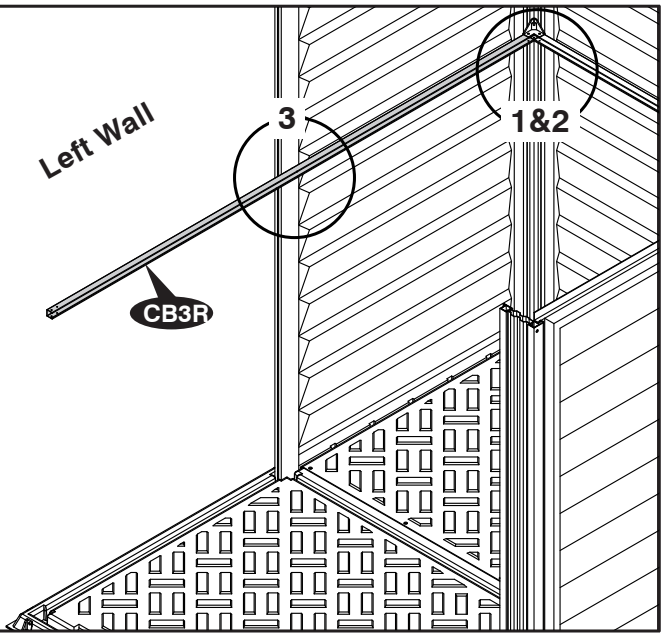

22

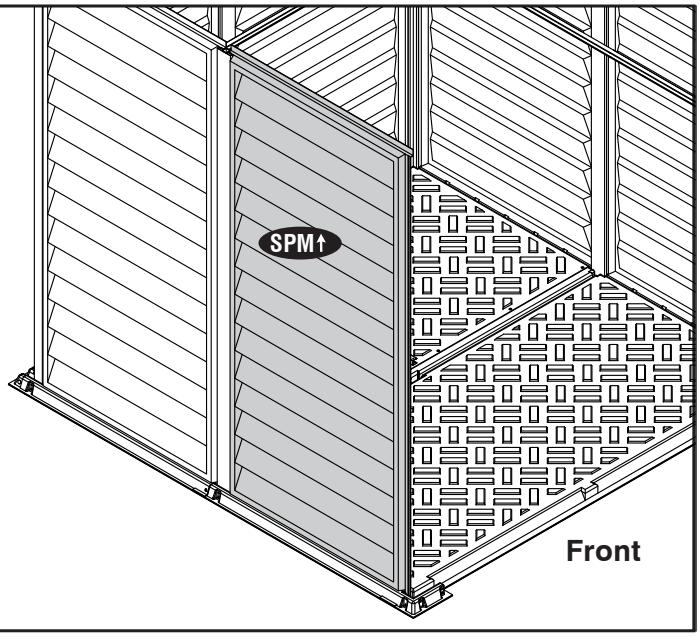

23

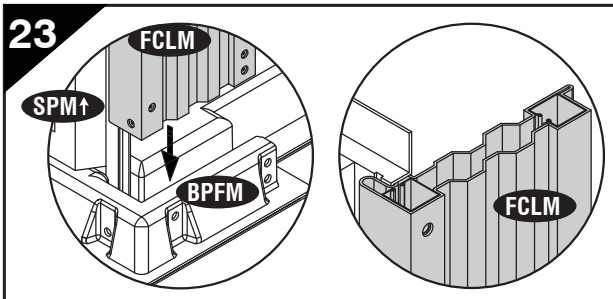

Fig.1

Fig.2

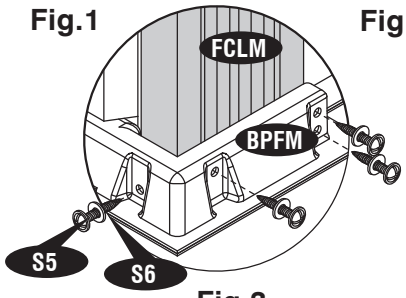

Fig.3

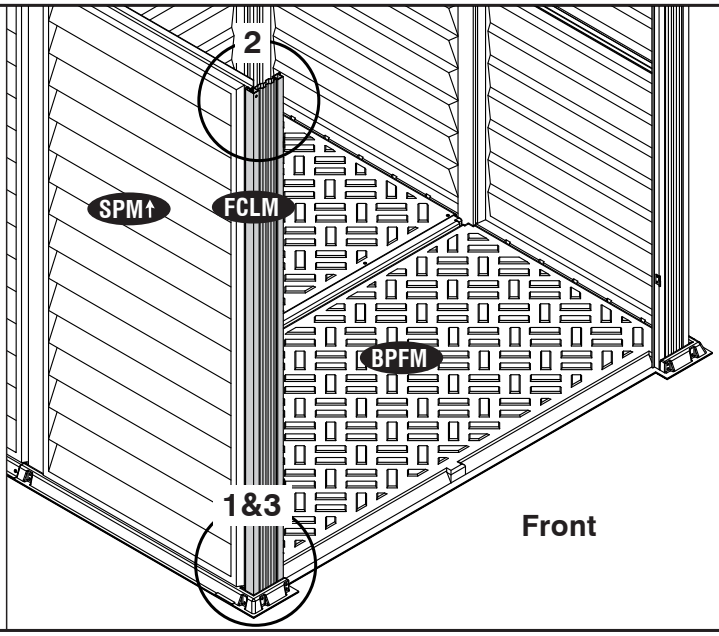

24

Note ***Do not tighten the screw. Leave it loose.***



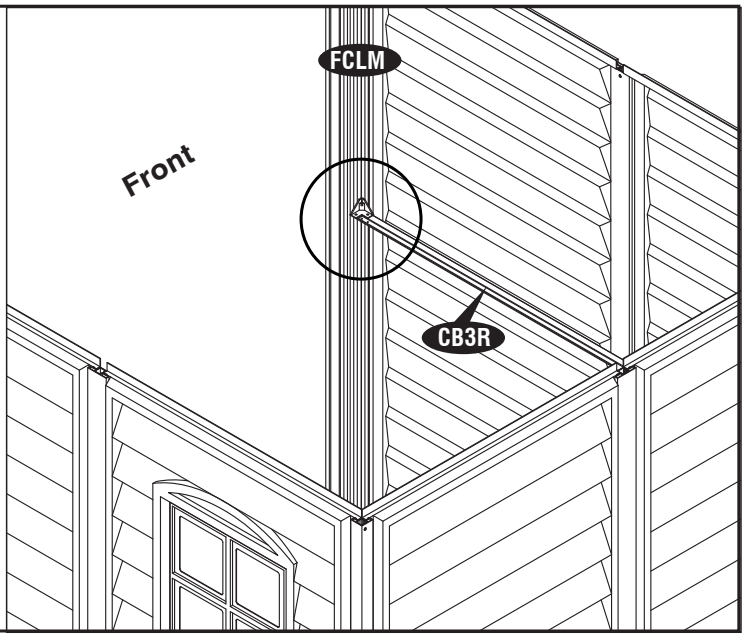

25



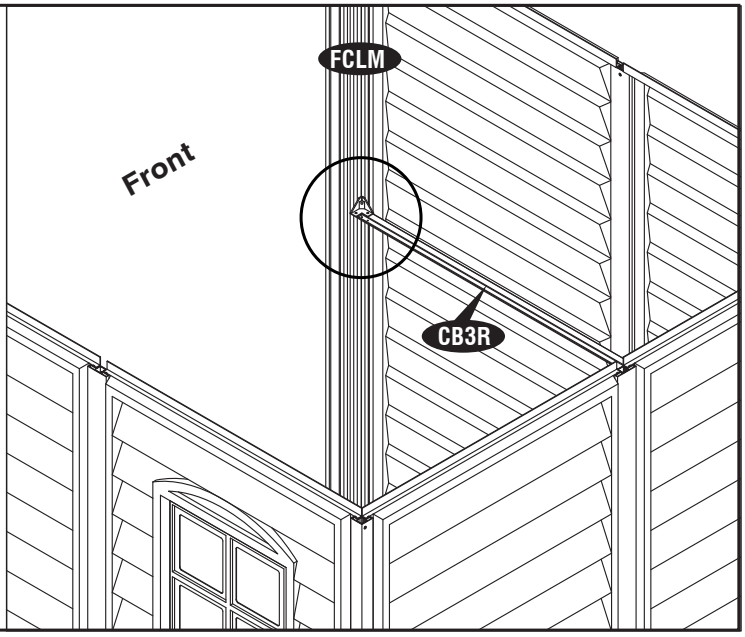

Note

After completing the center band assembly, fully tighten the four center band fittings (FCB) to the corner column.

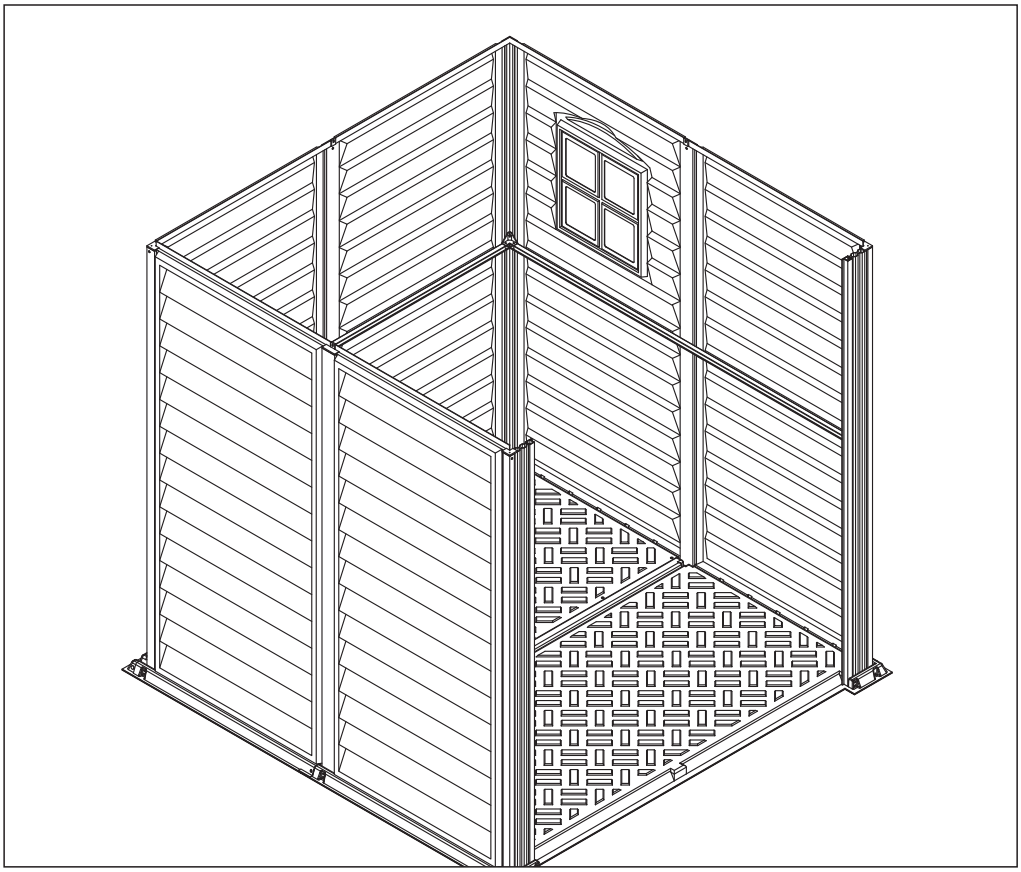

B. Roof Structures

Parts Needed

Code	Qty	Code	Qty
RS1R	2	DSHQ	1
RS3R	2	FDCL	1
RS5R	1	FDCR	1
RS8R	4	FCC	4
RS9R	4	FMC	3
RS2LR	3	RJ	4
RS2RR	3	S1	74
RS15Q	2	S2	4
		S7	2

1

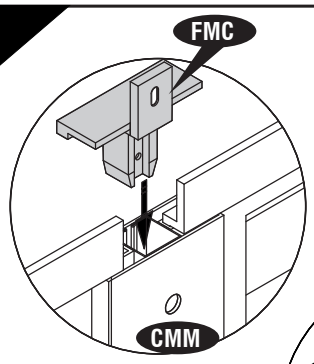

Fig.1

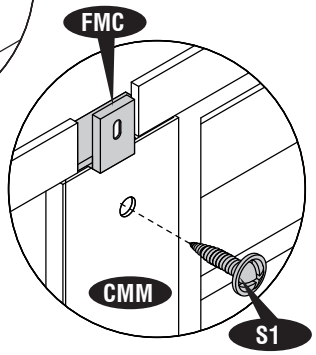

Fig.2

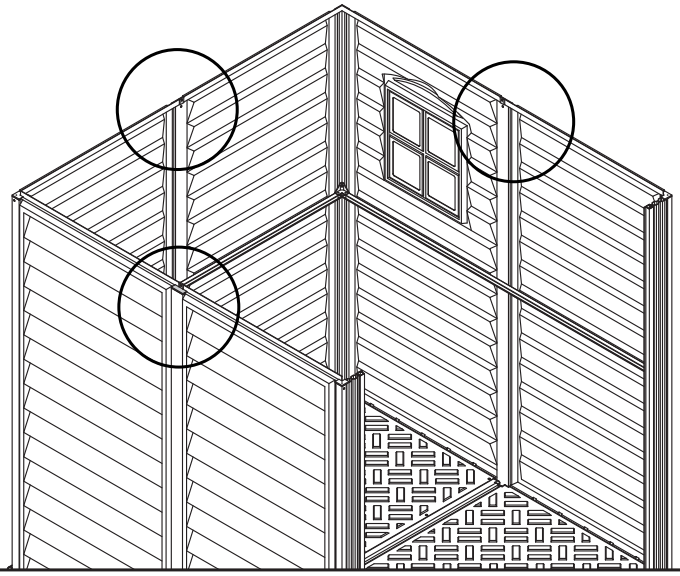

2



Fig.1



Fig.2



Fig.3



Fig.4

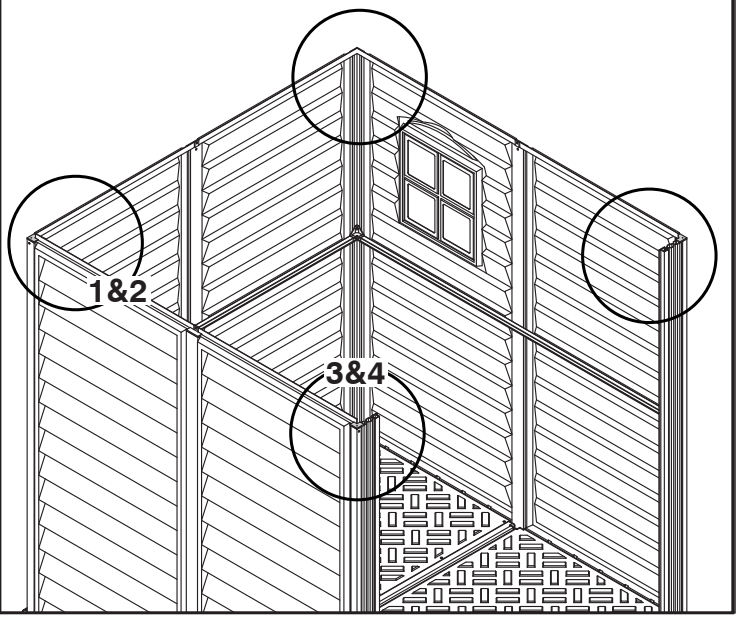

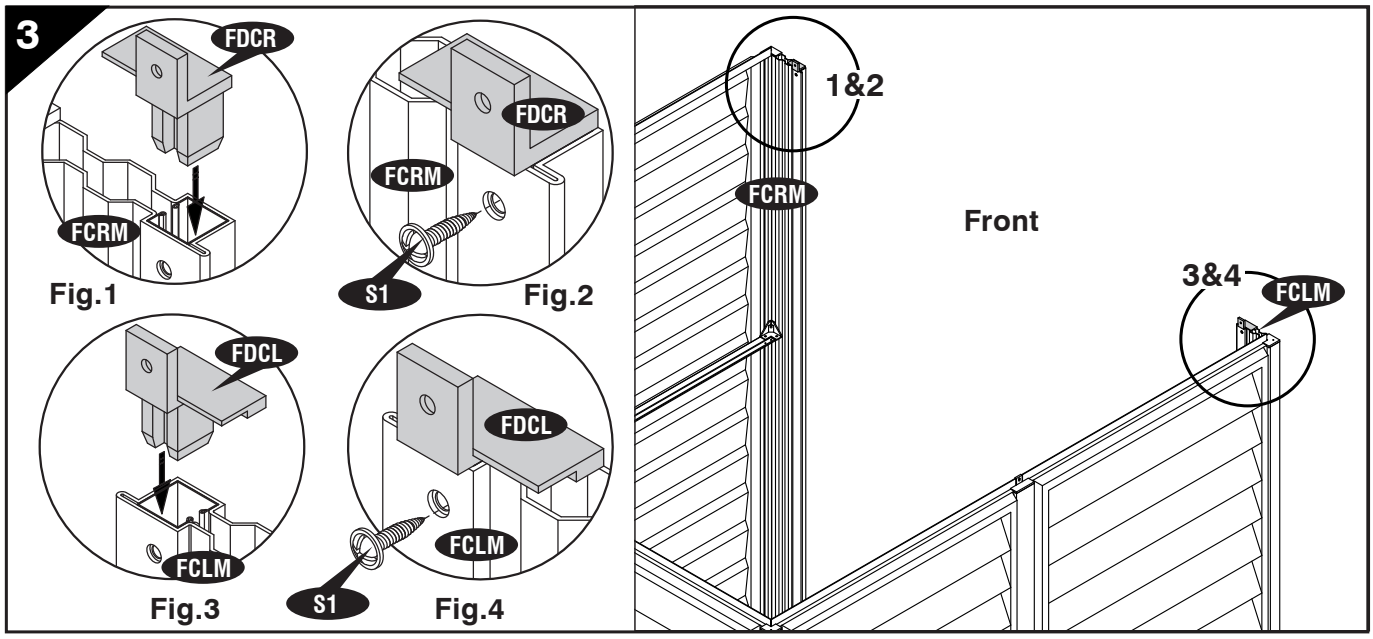

6’ x 6’ WoodSide Roof Structure Exploded View

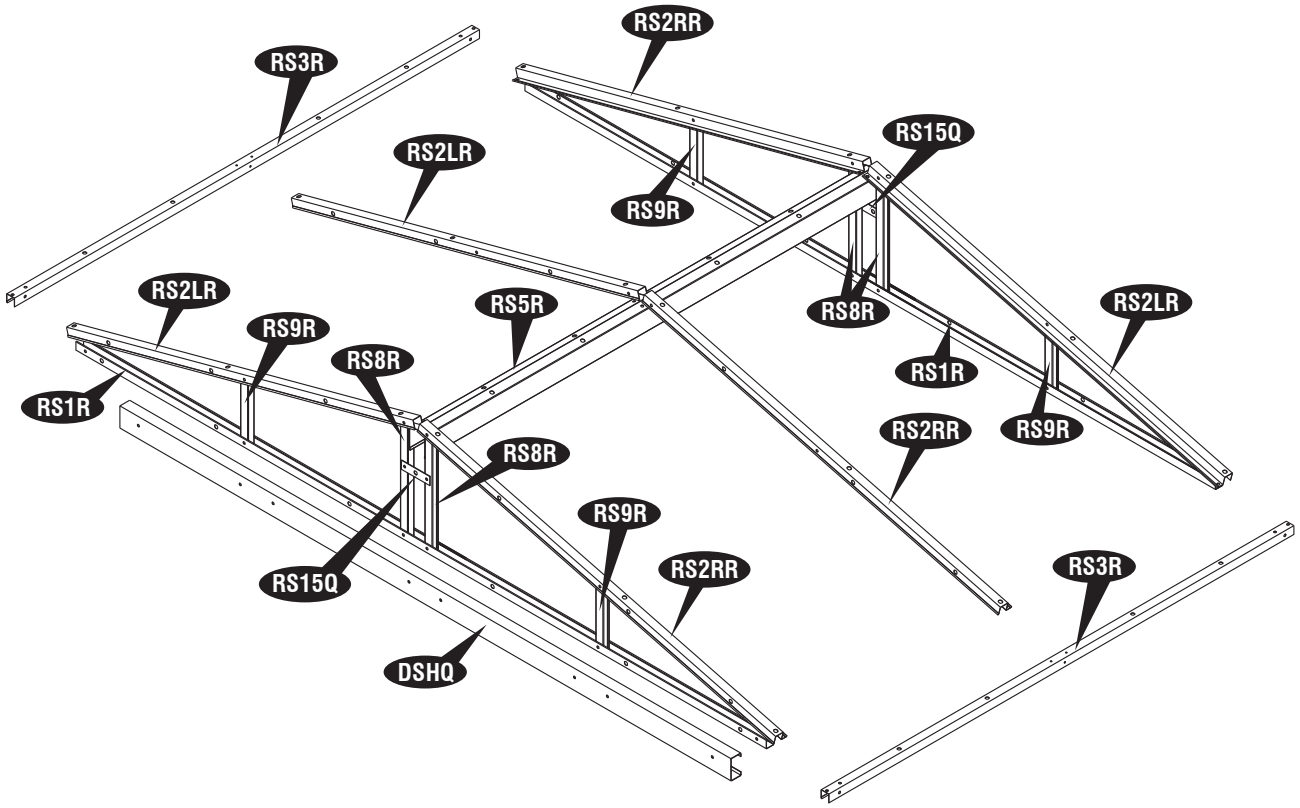

4 Front roof structure assembly

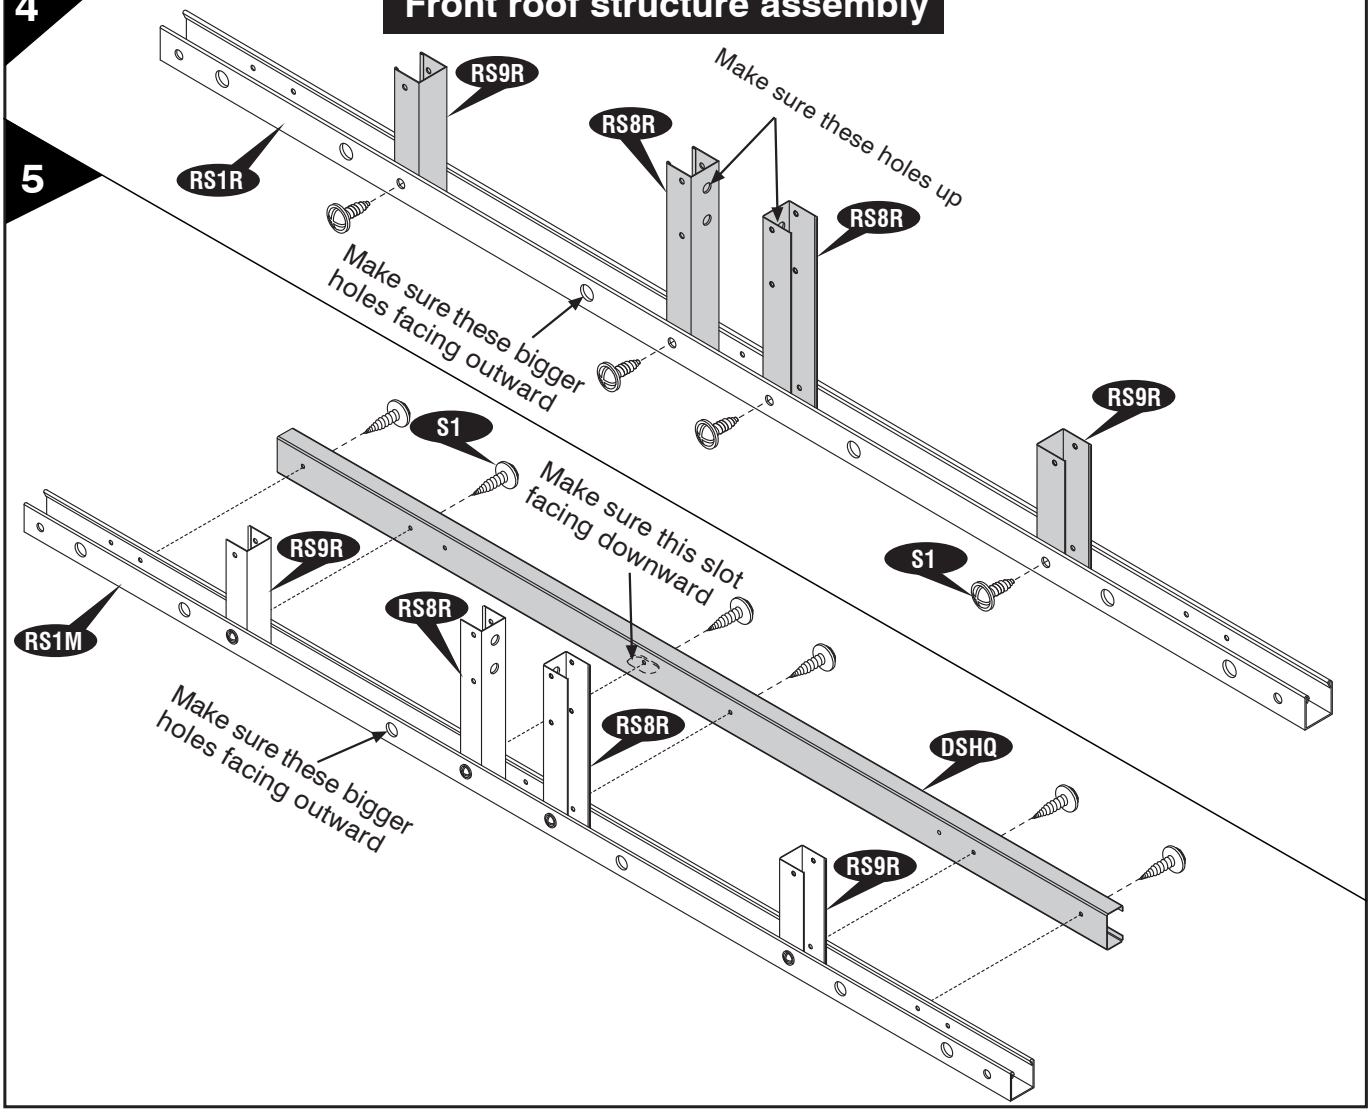

6 Back roof structure assembly

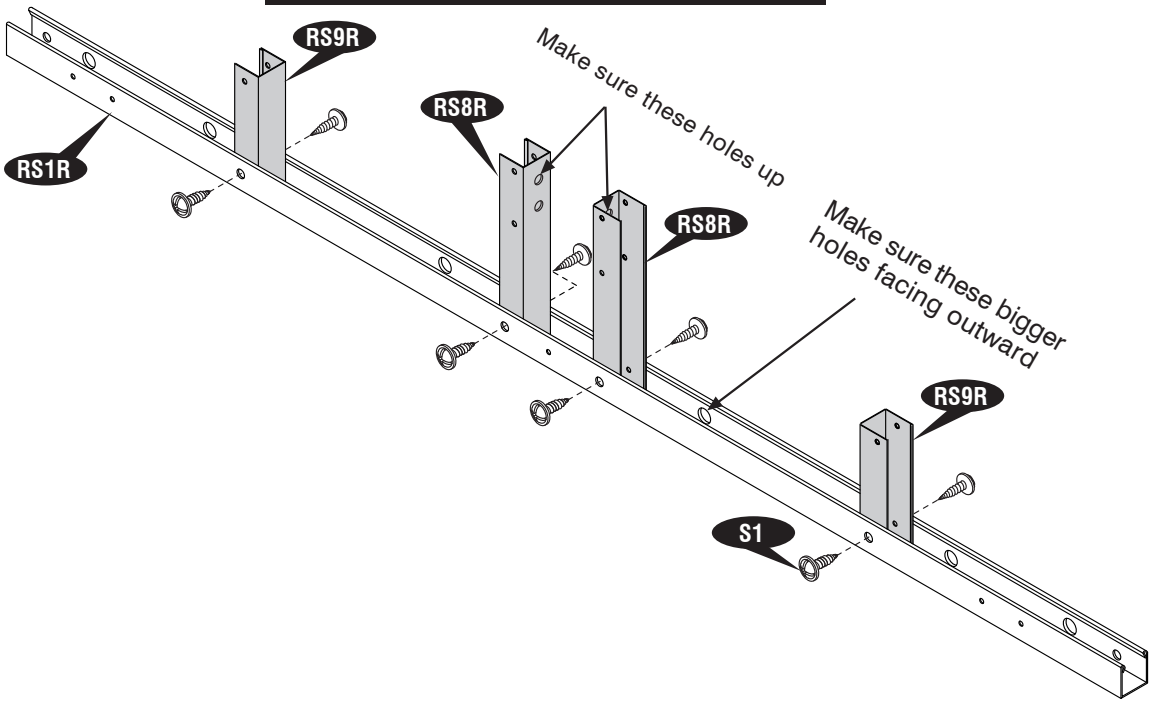

7

Note *Make two sets.*

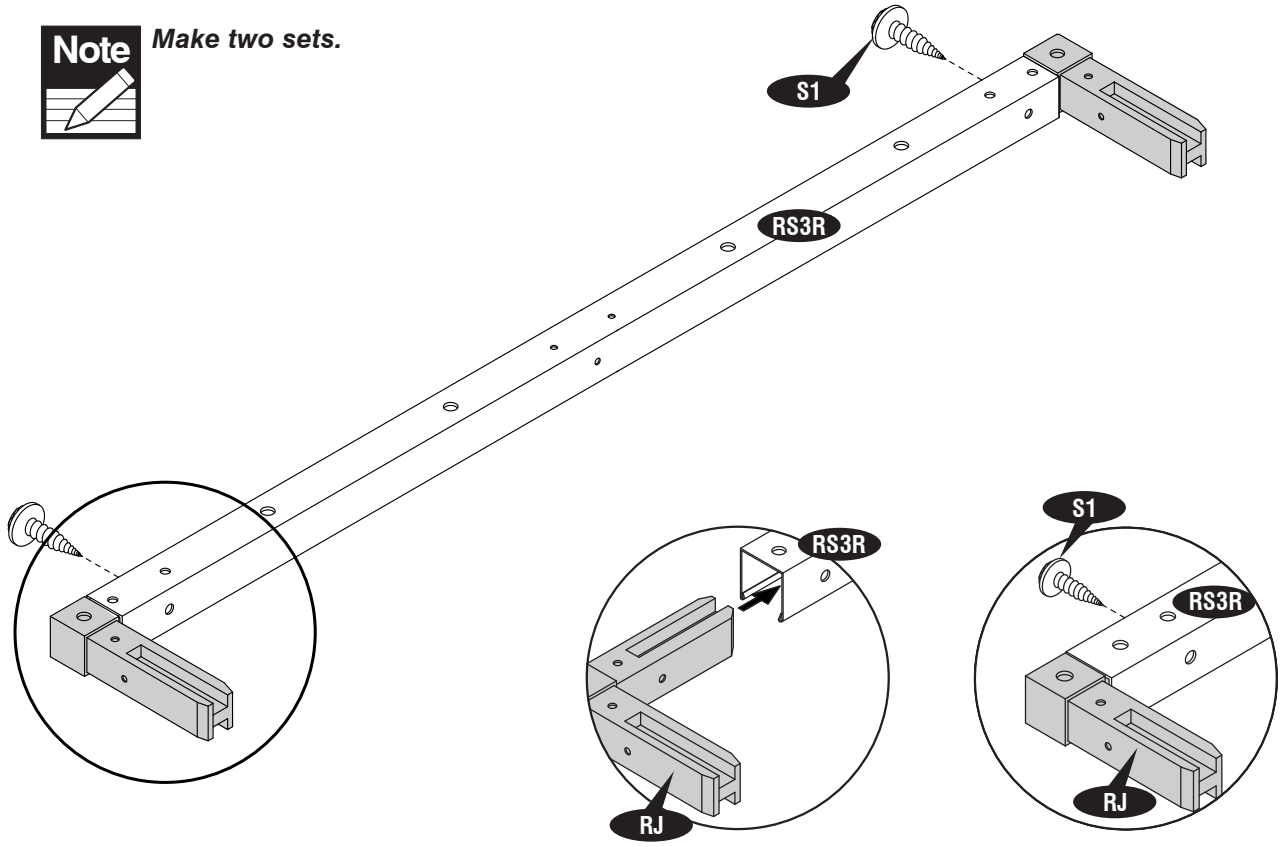

8

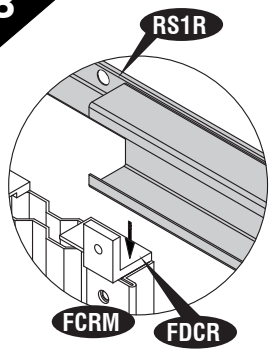

Fig.1



Fig.2



Fig.3



Fig.4

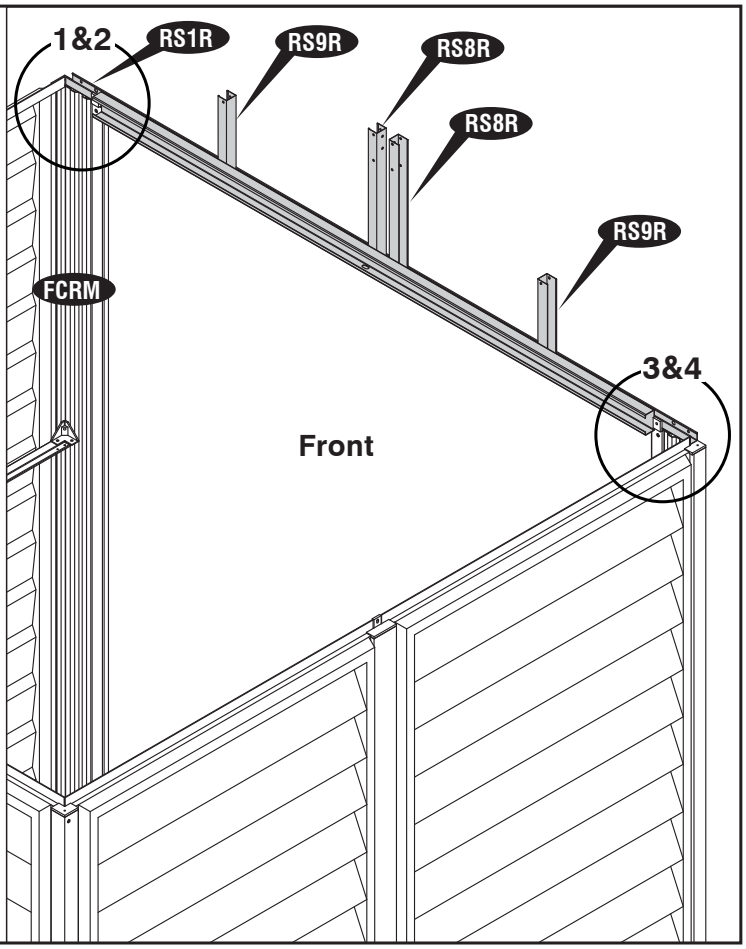

9

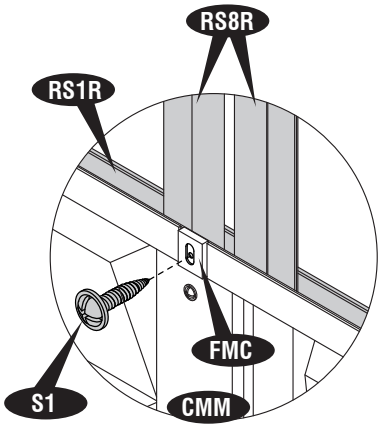

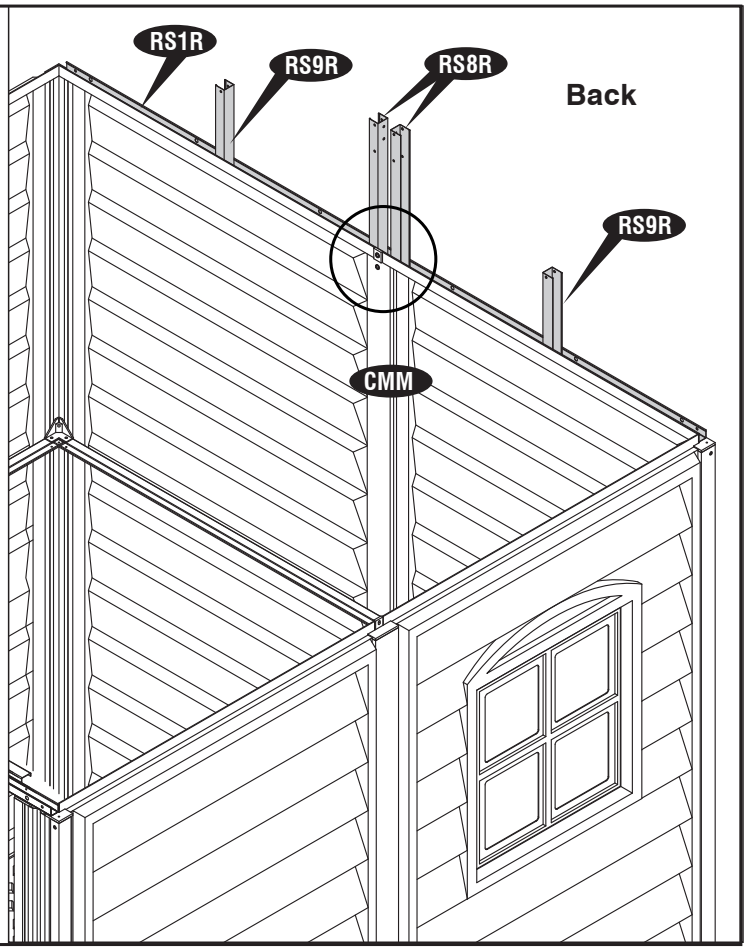

10



Fig.1



Fig.2



Fig.3

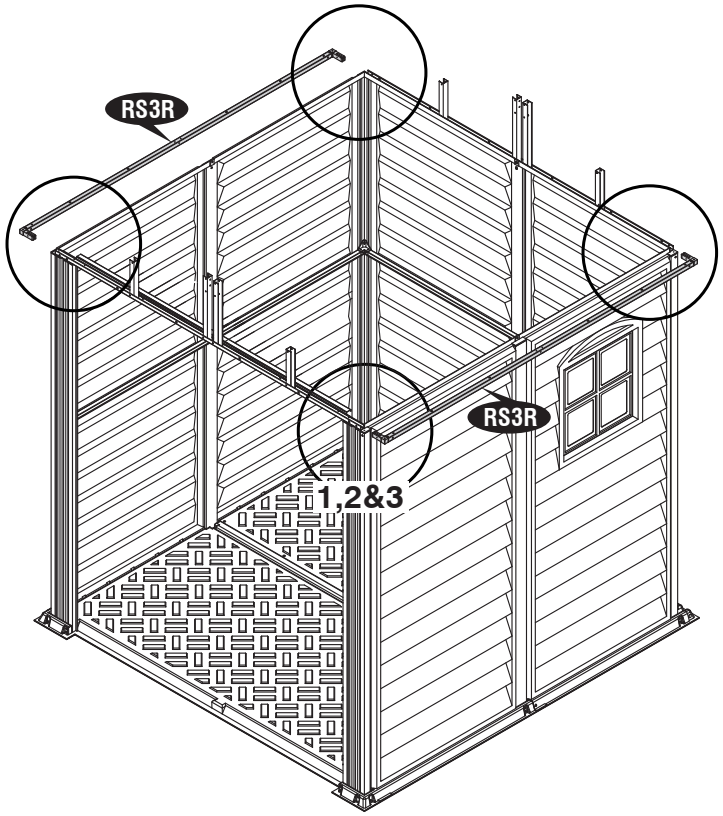

11



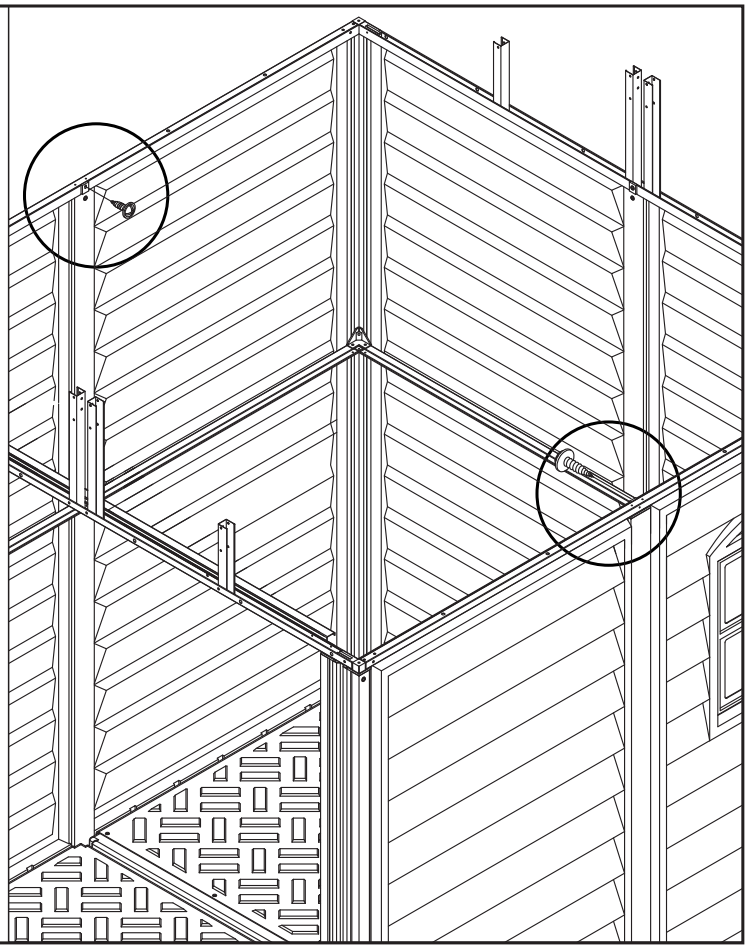

12



Fig.1

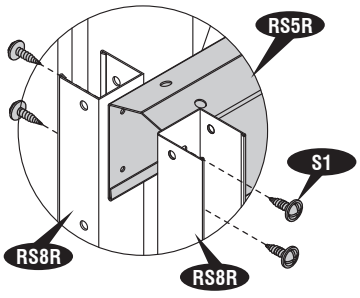

Fig.2

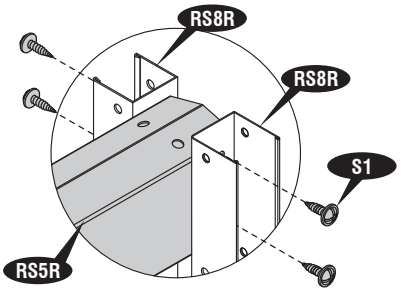

Fig.3

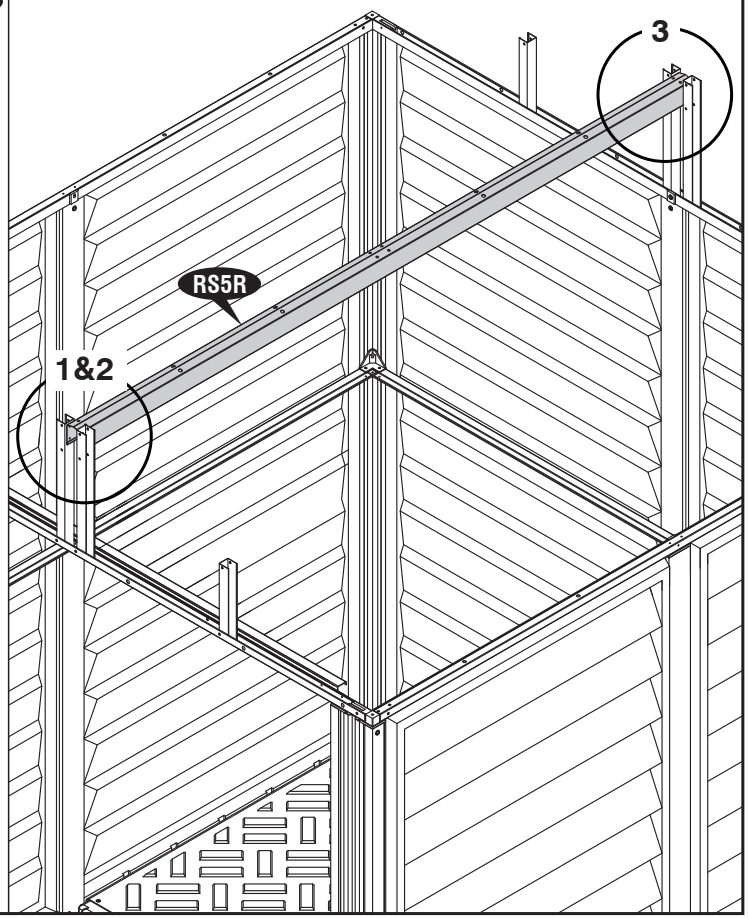

13

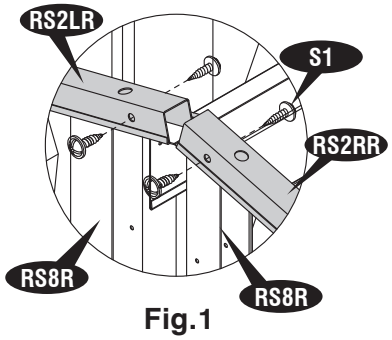

Fig.1

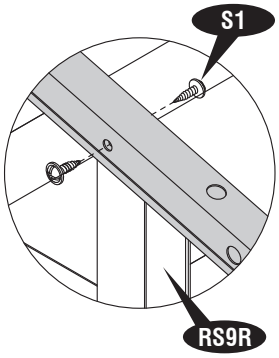

Fig.2

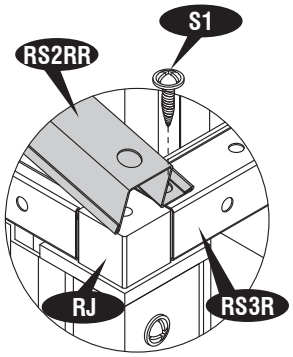

Fig.3

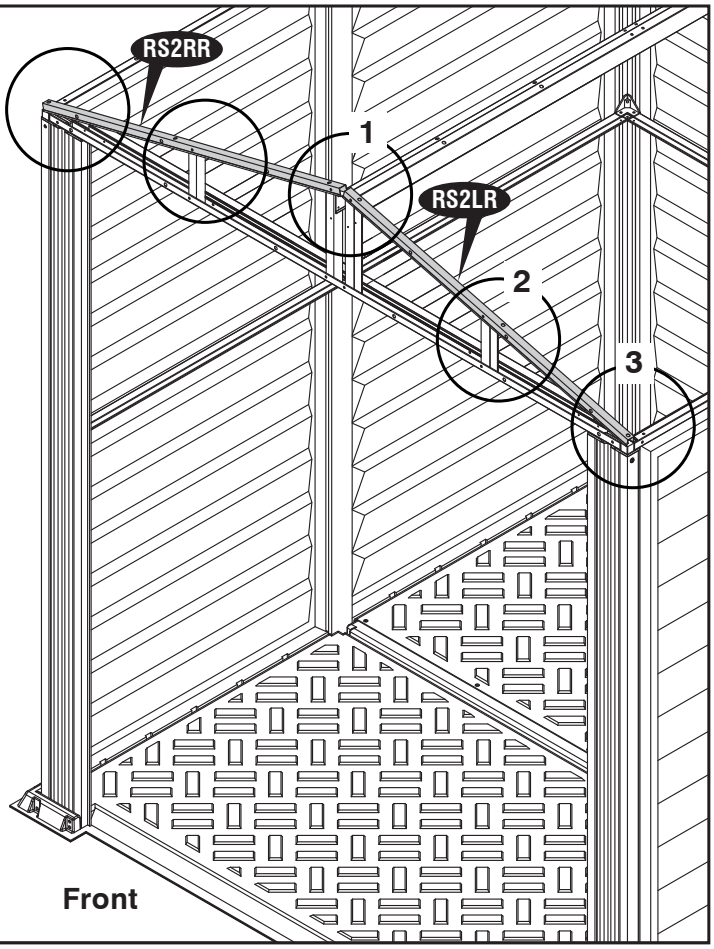

14

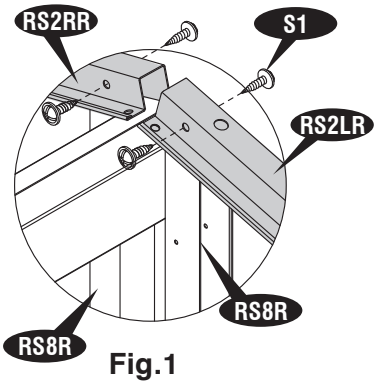

Fig.1

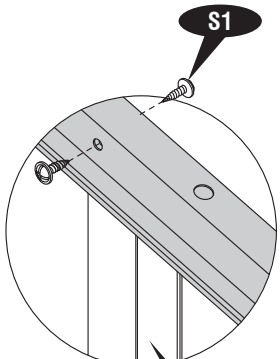

Fig.2

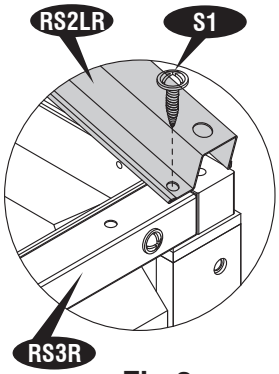

Fig.3

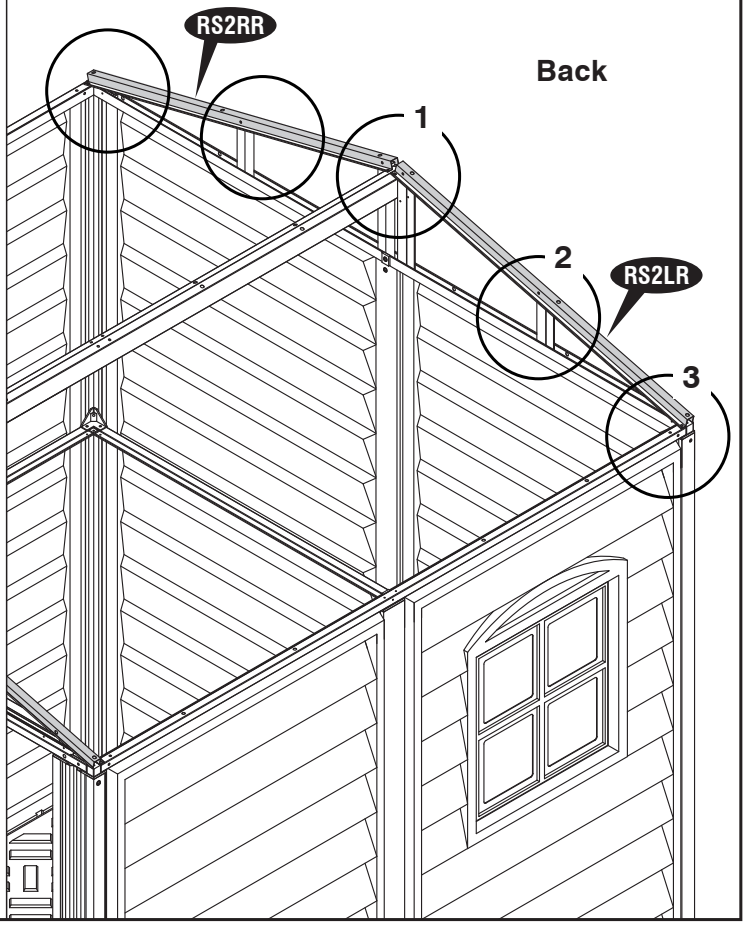

15

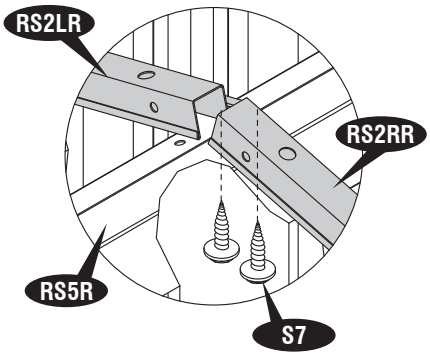

Fig.1

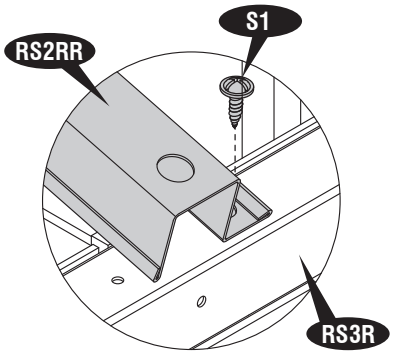

Fig.2

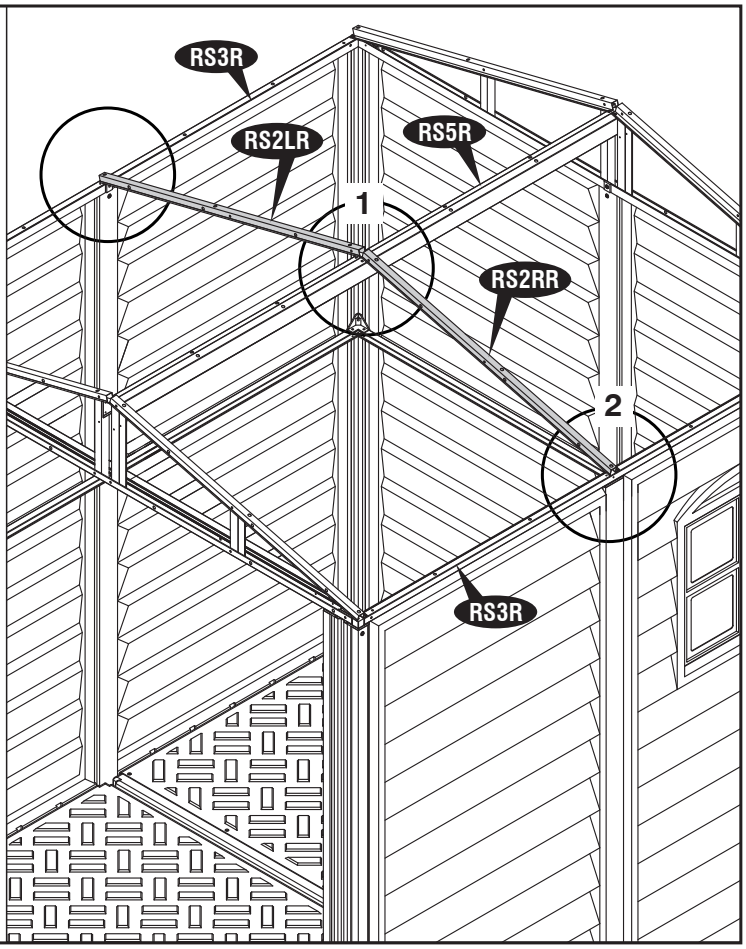

16

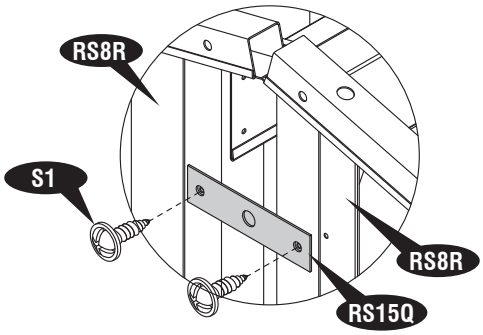

Fig.1

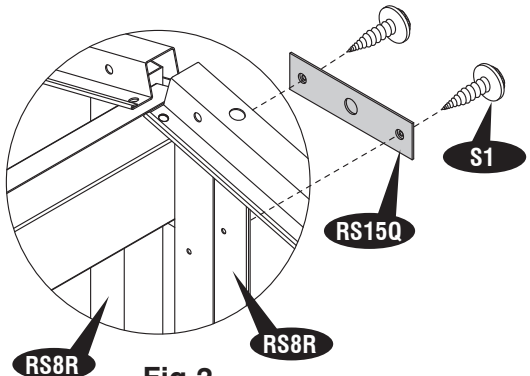

Fig.2

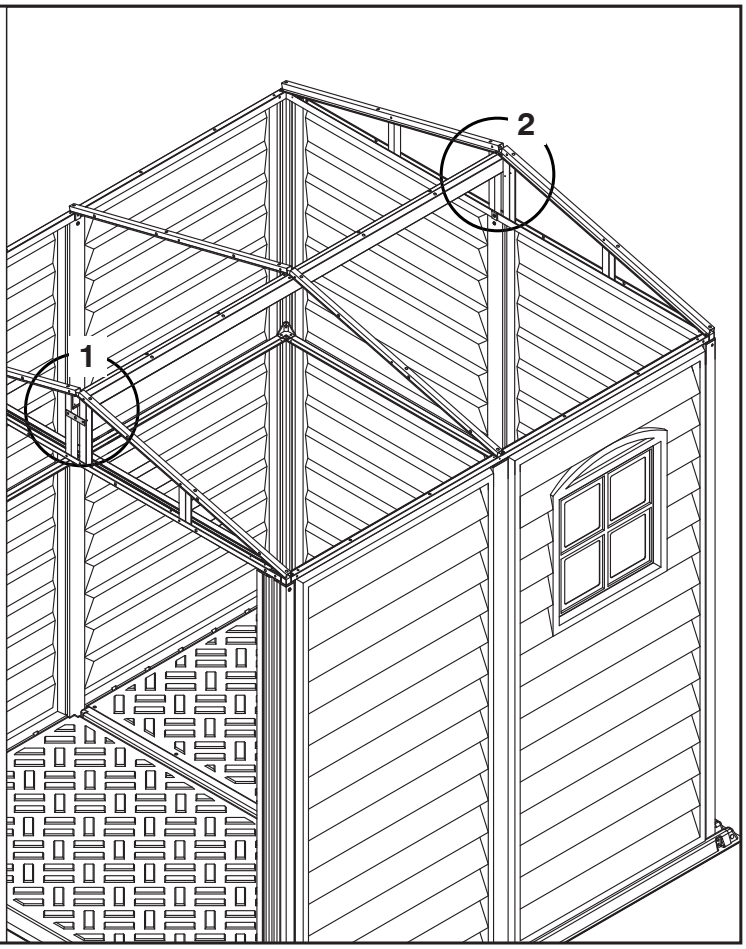

C. Roof Panels

Parts Needed

Code	Qty	Code	Qty
R1LR↑	1	EC	2
R2LR↑	1	PPG	57
R1RR↑	1	PIN	57
R2RR↑	1	PPGL	1
FPLM	2	PINL	1
FPRM	2	RS14R	4

Note

Facia panel with ventilation cover (FPRM & FPLM) can be fixed front or back of the shed.

Note

1. Insert roof plugs into Facia Panel only as indicated.

2. Use the same colour Plugs & Pins (PPG & PIN) to fix the Roof Panels & Facia Panels .

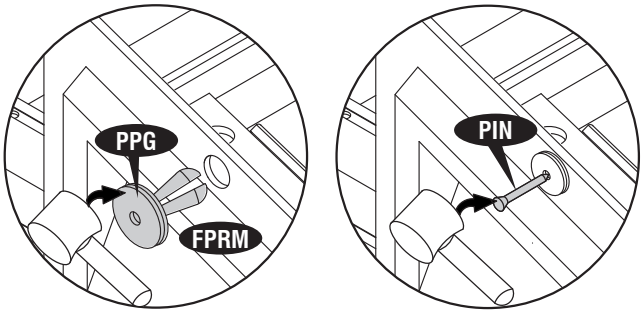

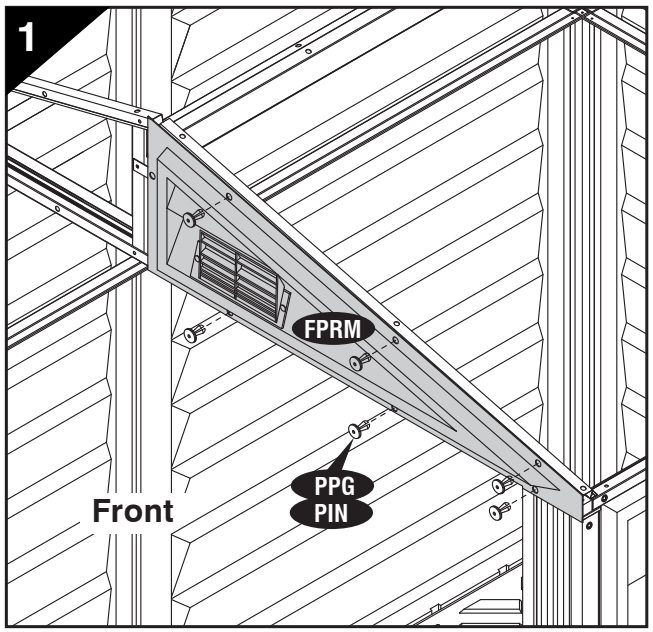

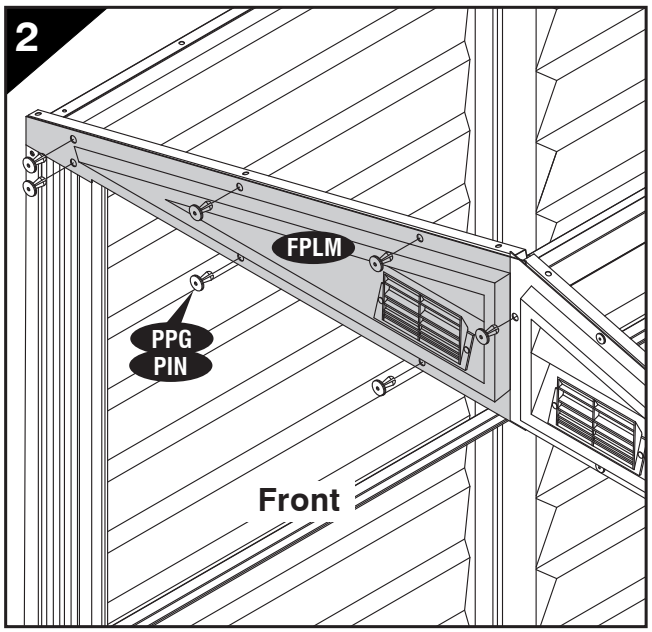

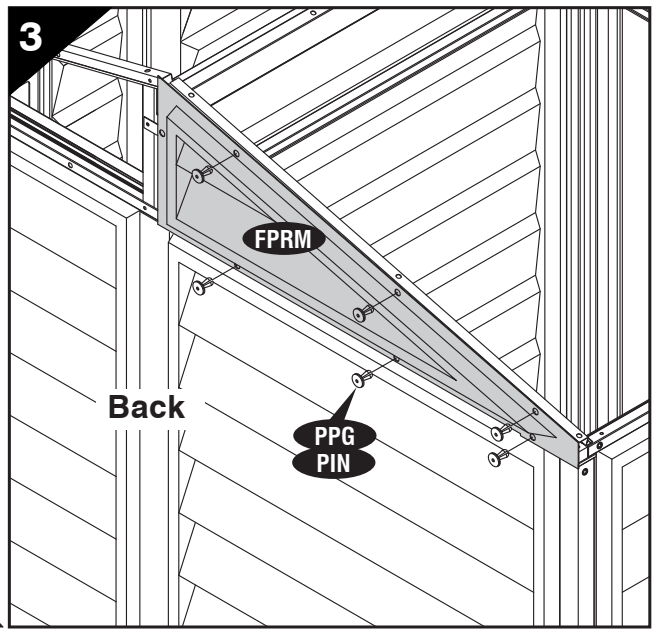

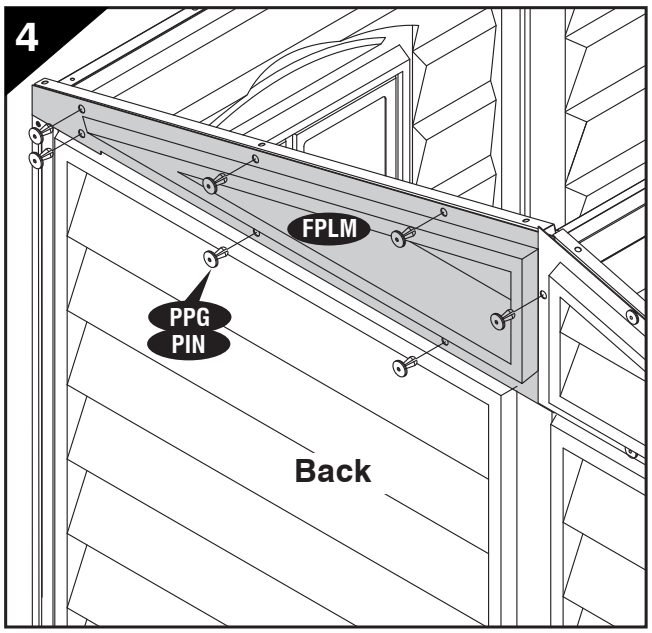

Note

Use a screw driver to align the holes.

Insert roof plugs into roof panels only as indicated.

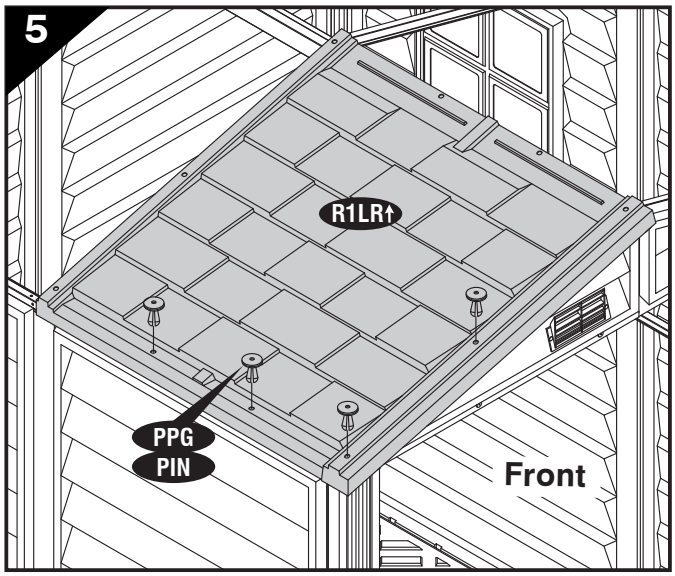

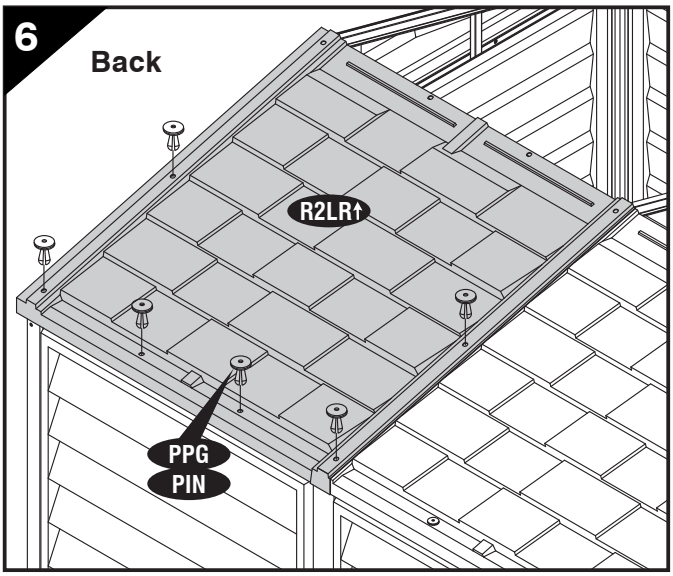

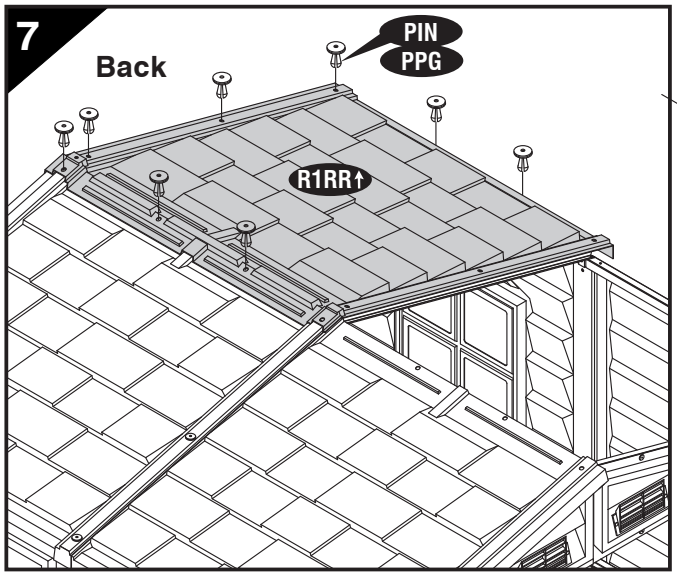

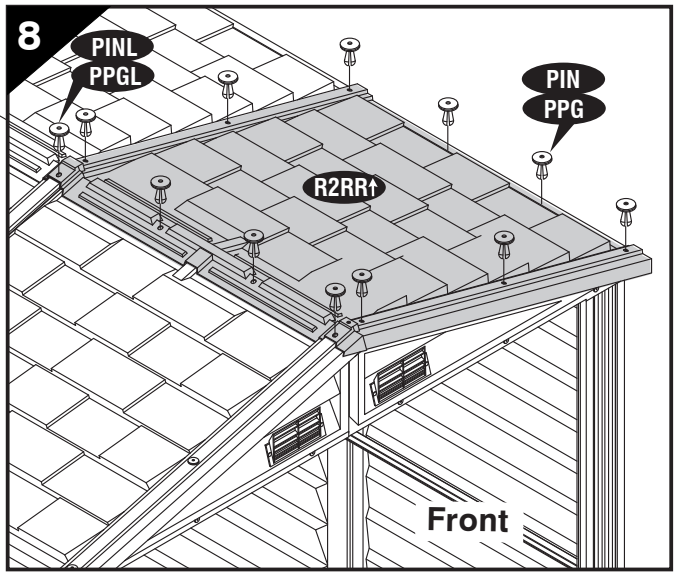

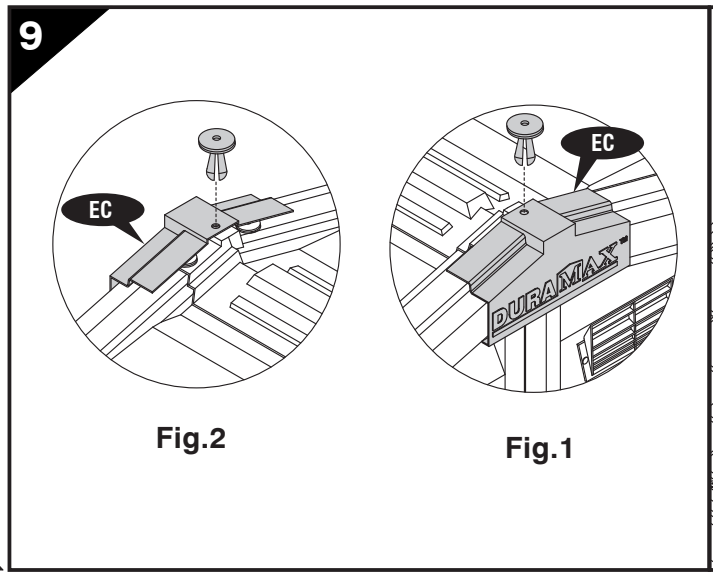

Fig.2

Fig.1

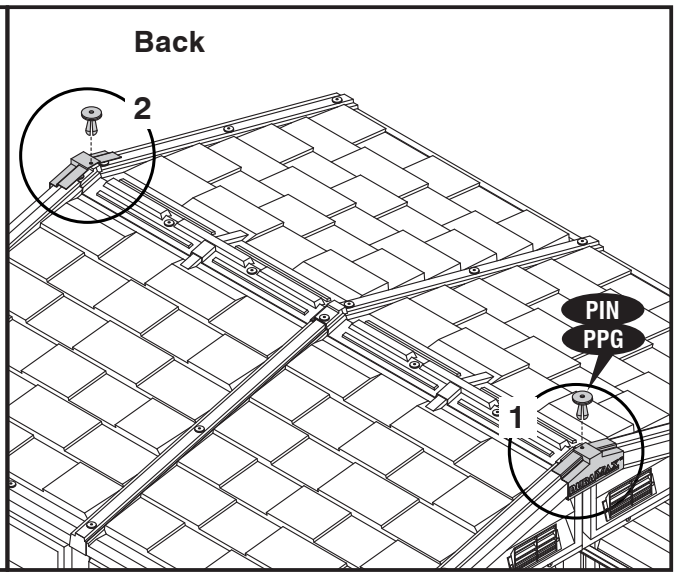

11

Note

Apply silicone around the roof plugs. This is optional and should be done for heavy rain areas if needed.

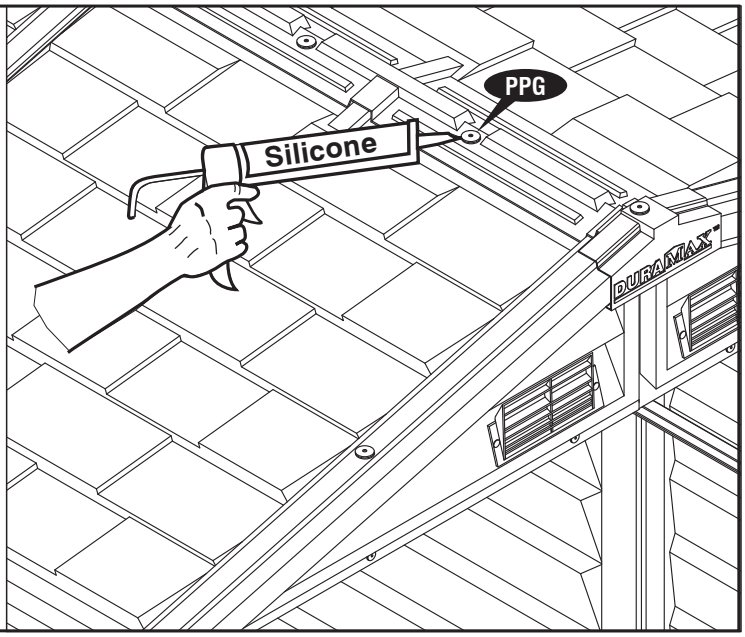

12

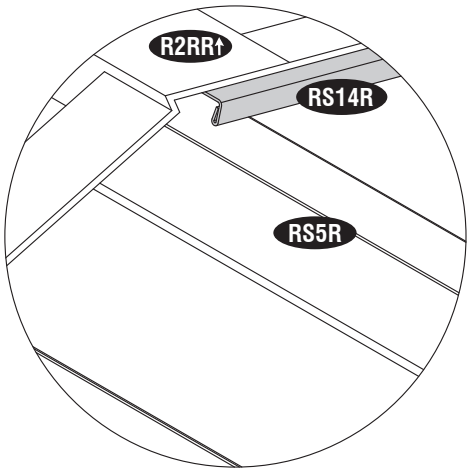

Fig.1

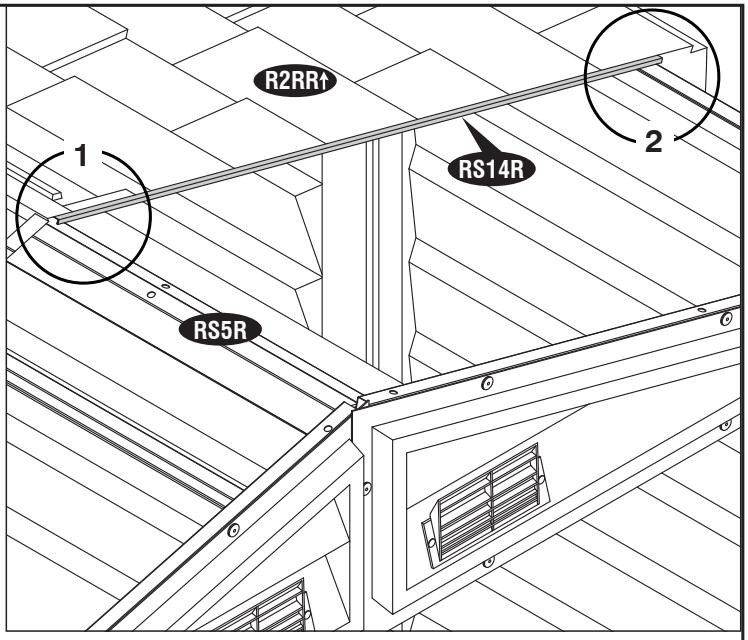

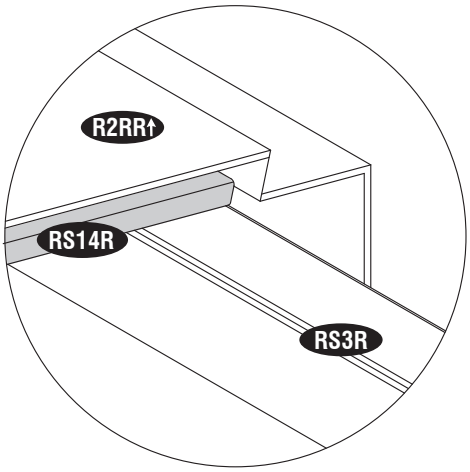

Fig.2

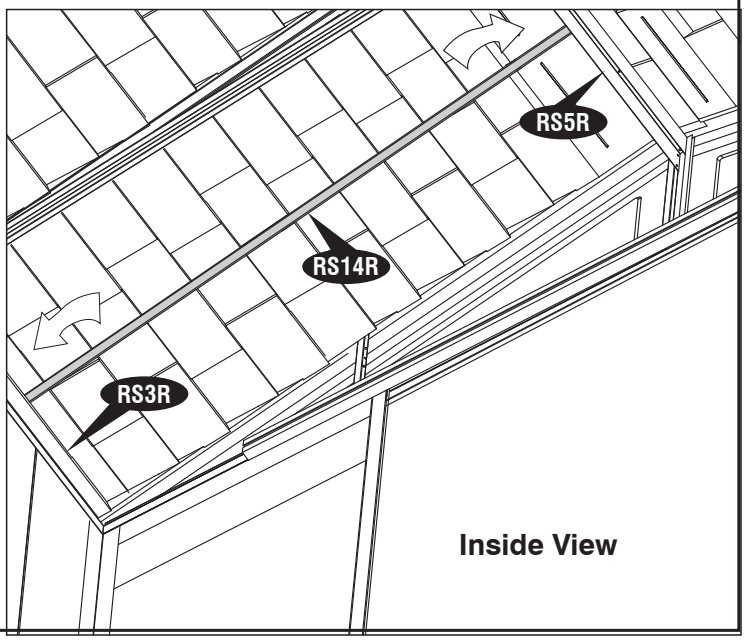

Inside View

D. Door

Parts Needed	
Code	**Qty**
DL	1
DR	1
L	1
R	1
S2	4

1



Fig.1



Fig.2

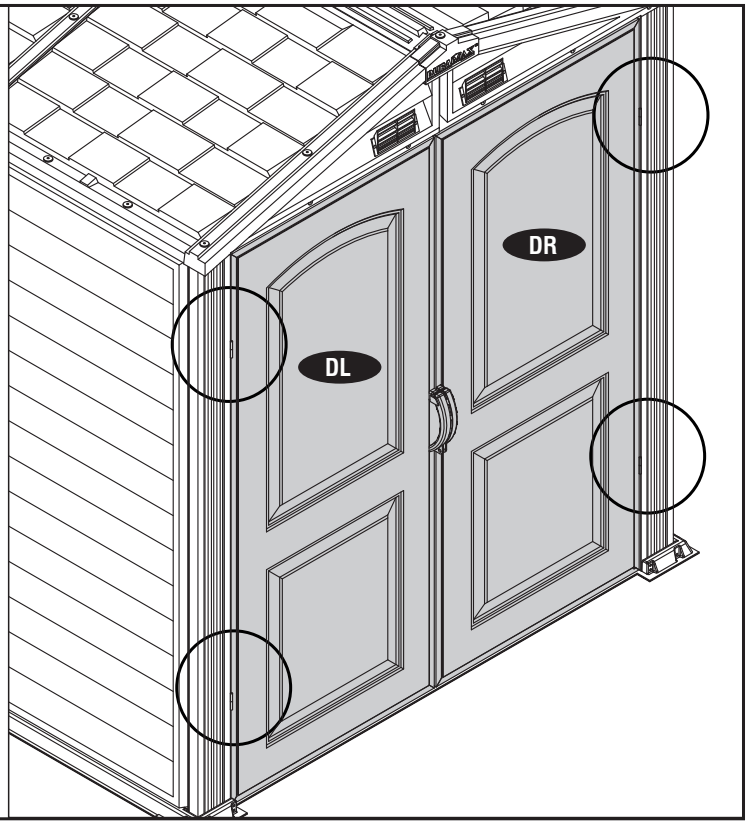

2



Fig.1



Fig.1



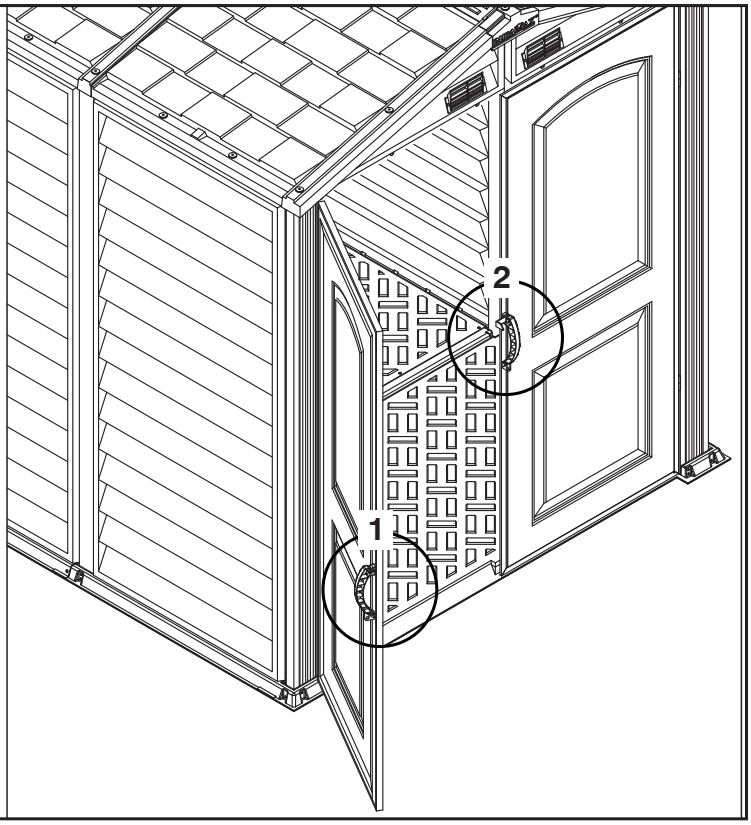

U.S. Polymers, Inc.
1057 S. Vail Ave
Montebello, CA 90640,
United States of America